

Penn Engineering **ESE**



Lecture #2 – A2D

ESE 150 – DIGITAL AUDIO BASICS

Based on slides © 2009–2022 Koditschek & DeHon
Additional Material © 2014–2017 Farmer

LECTURE TOPICS

- × Where are we on course map?
- × Part 1: Sound / Sound Pressure
 - ↳ Continuous, discrete, ADC, DAC
- × Part 2: Sampling & Quantization
 - ↳ Infinite, Continuous signals → Finite, Discrete data in bits

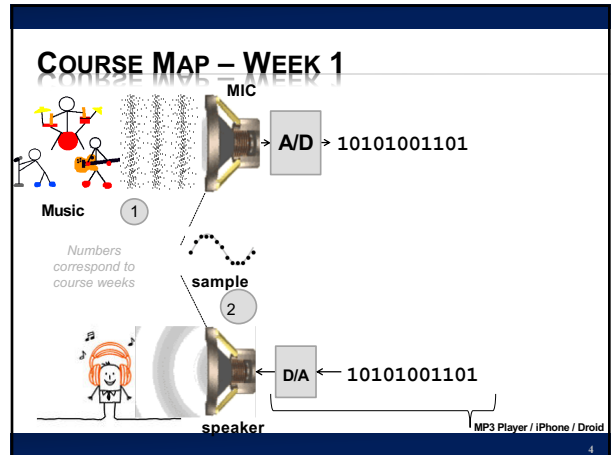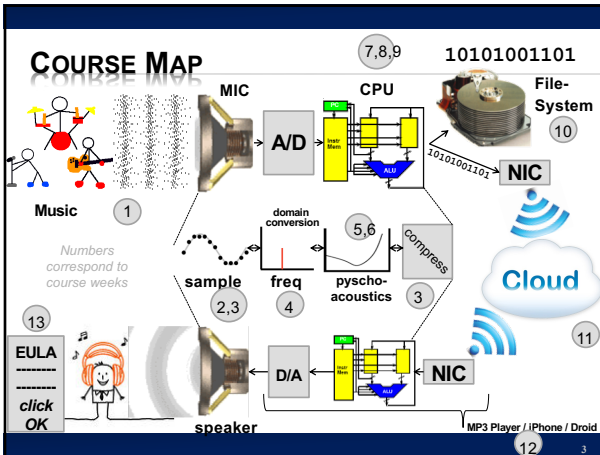

SOUND WAVES

INTRODUCTION TO SOUND



- × Sound is a pressure wave

<http://www.archive.org/details/SoundWaves.An>

WEEK 1: INTRODUCTION TO SOUND WAVES

Cycle = 1 iteration of sine wave
Hertz (Hz) = 1 cycle per second

1kHz = 1000 cycles/s




Source: <http://www.mediacollege.com/audio/01/sound-waves.html>

8

PRECLASS 1 AND 2

× Frequency of sine wave?

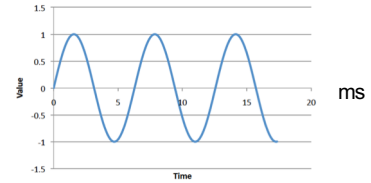

× Relationship between period and frequency?

9

WEEK 1: PRESSURE TO VOLTAGE

- × Microphones convert pressure to voltage
 - + (speakers/headphones voltage to pressure)
 - + Physical position to voltage

$$\Delta d \rightarrow \Delta C \rightarrow \Delta V$$


- × Reason as parallel plate capacitor
 - + ESE 112 or PHYS 151

$$C = \frac{\epsilon A}{d}$$

$$Q = CV$$

$$V = \frac{Q}{C}$$

Voltage is a function of distance (pressure)




10

SIGNALS

11

WE NEED TO DEFINE SOME TERMS

- × What is a signal?
 - + Something that carries information
 - + A description of how one parameter depends on another
 - × Common Engineering Example:
 - × Voltage that varies with time
 - E.g. Amplitude of voltage changes as time moves forward
 - × Time = **independent** variable (x-axis): time
 - Depends on nothing!
 - × Voltage = **dependent** variable (y-axis): $v(t)$
 - Voltage's amplitude depends on time



12

WE NEED TO DEFINE SOME TERMS


- × Most signals encountered in nature...
 - + ...are "**continuous**" / analog
 - × Continuous range of values (any real #)
 - × Examples: 1) Light intensity that changes with distance
 - × 2) Voltage that varies over time $v(t)$
 - *We will see in lab this week: MUSIC signal represented with voltage*
 - × 3) Chemical reaction rate that depends on temperature
 - + as opposed to "**non-continuous**" / discrete signals
 - × Only a discrete range of values possible (limited subset of real #s)
 - × How a computer must represent signals
 - Fundamental unit of information: **bit**
 - Cannot represent all possible real #'s
 - Uses binary digit (bit) to represent #'s:
 - 1-bit, represents 2 things...2-bits, represents 4 things
 - What's the generalization? (n-bits → how many things?)

13

BIG QUESTION

- × How represent and process *continuous* information on a digital computer with *finite* memory?

+ Note: continuous means signal may take on infinite number of values between any T_1 and T_2



14

CONNECT THE DOTS

- × Intuition, with enough dots, not hard to “connect-the-dots” to reconstruct (understand) the continuous signal.

+ What is the continuous signal here? (preclass 3)


+ Assumes certain regularity conditions

+ What is enough?

+ Not unlike calculus

+ Limit as $\Delta x \rightarrow 0$

+ Discrete sum approaches Integral



15

DEFINITIONS

- × **Analog-to-Digital (ADC) Conversion**

+ Process of converting *continuous* signal to *discrete* signal


+ Going from analog to digital “domain”

+ Often called: digitization

+ Use a subset of real #'s to represent all real #'s

× Involves a lot of approximation (lots of room for error!)

- × ...collecting the dots



16

DEFINITIONS


- × **Digital-to-Analog (DAC) Conversion**

+ Process of converting *discrete* signal to *continuous* signal

+ Going from digital to analog “domain”

+ Converting “bits” to a continuous waveform

× Our MP3/Music players do this all the time (will do in lab2)

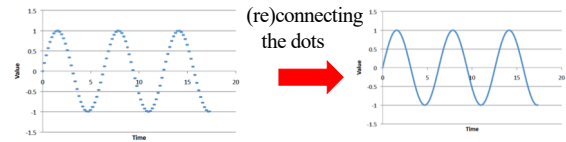

17

Part 2

SAMPLING & QUANTIZATION

18

ADC – SAMPLING & QUANTIZATION

- × **Analog-to-Digital (ADC) Conversion**

+ Converting analog (continuous) signal to digital signal

+ Digitization process has two important aspects:


× 1) *Sampling*

× Converting *independent* variable of signal from continuous to discrete

× e.g.: breaking continuous *time* down into intervals

× Pick Δx

× Look at value ever 1 ms



× 2) *Quantization*


× Converting *dependent* variable of signal from continuous to discrete

× e.g.: breaking continuous *voltage* down into levels

× Round value to nearest 0.25 volts

19


ADC – BROKEN INTO TWO PARTS

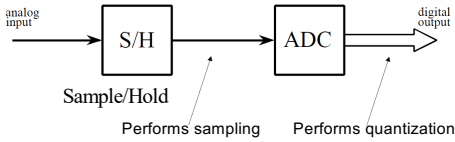

Figures from reading: *The Scientist and Engineer's Guide to Digital Signal Processing*, By Steven W. Smith

20

ADC – BROKEN INTO TWO PARTS

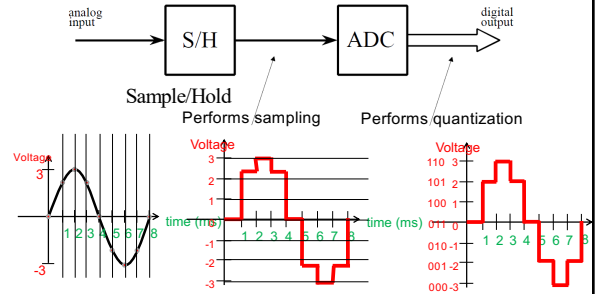


21

ADC – SAMPLING

× Analog-to-Digital (ADC) Conversion

- **Sampling:** breaking independent variable (time) into intervals
- Example: Let's sample our continuous signal @ 1 ms intervals:

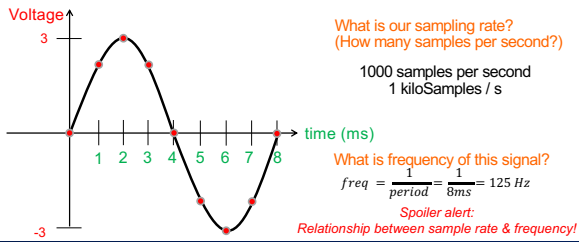


22

ADC – QUANTIZATION

× Analog-to-Digital (ADC) Conversion

- **Quantization:** breaking dependent variable (voltage) into levels
- Ex: Let's quantize our range of voltages into 7 levels (1 Volt each)

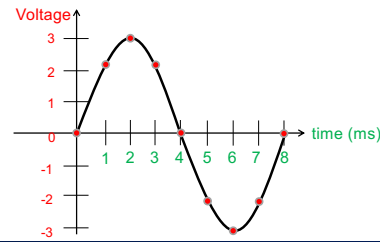


23

ADC – SAMPLING & QUANTIZATION

× Analog-to-Digital (ADC) Conversion

- Let's collect our samples at the quantized levels

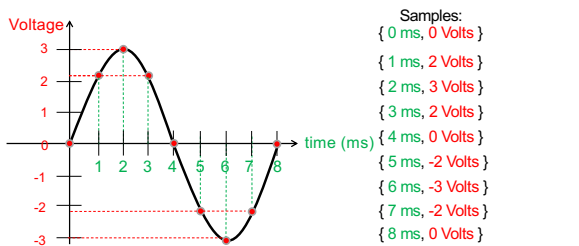


Notice, we are rounding! Error is inherent in this process

24

ADC – DIGITAL CONVERSION / ENCODING

× Analog-to-Digital (ADC) Conversion

- We've converted something continuous into discrete form
- How do we get it to "digital form"? We **encode** it... (map to another format)

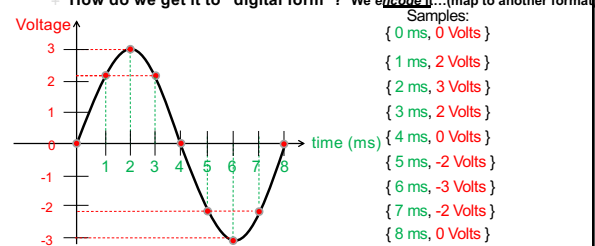


25

ADC – DIGITAL CONVERSION / ENCODING

× Analog-to-Digital (ADC) Conversion

- We have 7 discrete voltages, # of bits to represent 7 things?
- 3-bits! Why? $2^3\text{-bits} = 8$ (1 unused state)

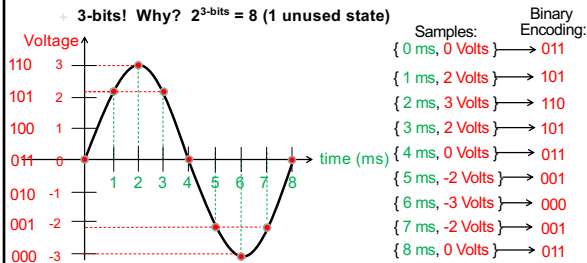

Encoding: mapping data from one form to another (not always conversion) 26

ADC – STORING THE DATA

× Analog-to-Digital (ADC) Conversion


- What do we store? Just the encoded bits:
 - × Our digitized signal: {011, 101, 110, 101, 011, 001, 000, 001, 011}
 - × It is now discrete & in digital format, store bits in MP3 player!
- Why can we avoid storing the time?
 - × It's repetitive! Just store sampling rate: 1 kilo-samples/sec
 - × Later, if we wish to restore signal, each "sample" occurred at 1ms
- In this example:
 - × Sampling rate: 1 k-samples/sec
 - × Resolution: 3-bits
 - × Our digitized signal: {011, 101, 110, 101, 011, 001, 000, 001, 011}

27

ADC – AN APPROXIMATION AT BEST



× Analog-to-Digital (ADC) Conversion

- Continuous analog signal overlaid with discrete digital signal
- At best an approximation of original signal

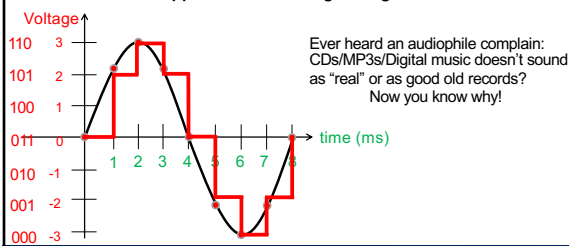

28

ADC – BROKEN INTO TWO PARTS

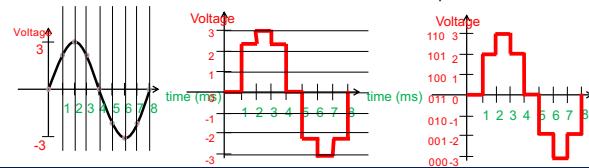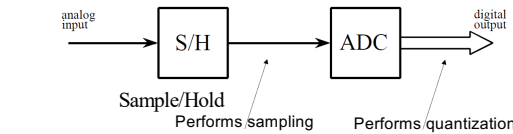


29

ADC – AN APPROXIMATION AT BEST

× Digital-to-Analog (DAC) Conversion

- Process of converting *discrete* signal to *continuous* signal
- How to get back to original signal from bits?

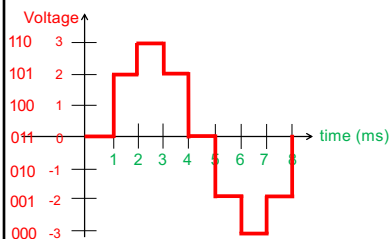


30

ADC – AN APPROXIMATION AT BEST


× Digital-to-Analog (DAC) Conversion

- Process of converting *discrete* signal to *continuous* signal
- How to get back to original signal from bits?

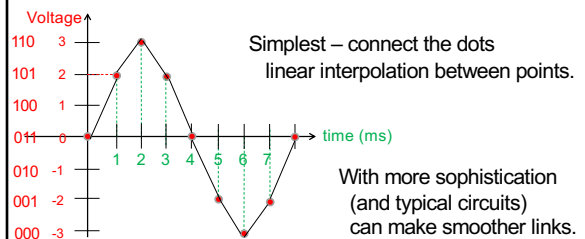

31


ADC / DAC – THE FULL PICTURE

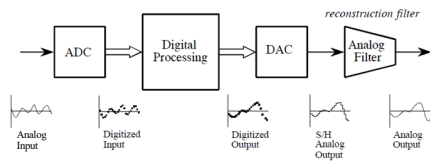

Figures from reading: *The Scientist and Engineer's Guide to Digital Signal Processing*, By Steven W. Smith

33

PCM



× Quantization & Sampling Technique described:

- + Called Pulse-Code-Modulation (PCM)
 - × Patented in 1943
 - × PCM process is the ADC process
 - × Developed for telecommunications

34

NEXT STEPS

- × **Lab Today:** sample sound waveforms
- × **Monday:** look more formally and quantitatively at quantization and errors from quantization
- × **Next Wednesday:** Start looking at discrete sampling rates

35


LEARN MORE

- × **ESE215 – basic analog circuitry, RLC circuits, simple filters**
 - + Including why typical circuits give smoother (not linear) connection of dots
- × **ESE568 – Mixed Signal Integrated Circuits**
 - + Build A2D, D2A

36

BIG IDEAS

- × **Approximate continuous waveform on digital media by**
 - + Discretize in all dimension
 - + For audio: in time and amplitude
 - × Sample in time; quantize voltage
- × **Allows us to store audio signal as sequence of bits**
- × **Reconstruct by “connecting-the-dots”**
 - + If our dots are frequent enough to represent the signal



37

ADMIN

- × **Reading for today, next Wednesday on syllabus**
- × **Lab Today**
 - + Lab kit pickup today 5:30pm-6:45pm Levine Lobby
 - + Lab partners posted
 - × If you cannot pick up a kit, you have a partner who can
 - + Read lab, work prelab (includes download software)
- × **Remember feedback**
- × **TA Office Hours this week**
 - + R2pm, F3-5pm, Sun. 2-4pm

38

REFERENCES

- × S. Smith, "The Scientists and Engineer's Guide to Digital Signal Processing," 1997.
- × Wikipedia, http://en.wikipedia.org/wiki/Analog-to-digital_converter
- × Wikipedia: http://en.wikipedia.org/wiki/Pulse-code_modulation