

ESE 531: Digital Signal Processing

Lec 15: March 21, 2017
Review, Generalized Linear Phase Systems



Penn ESE 531 Spring 2017 – Khanna

John A. Quinn Lecture

The 2017 John A. Quinn Lecture in Chemical Engineering



"Computation and Uncertainty: The Past, Present and Future of Control"

Manfred Morari
Distinguished Faculty Fellow
Department of Electrical and Systems
Engineering
University of Pennsylvania

Thursday, March 23, 2017
3:00 pm, Wu and Chen Auditorium
Levine Hall

Reception to follow seminar - Levine Lobby

Abstract:

In reflecting on our work over the last 40 years, I found that it was dominated by two themes: computation and uncertainty. In this talk, I will describe how the rapidly increasing computational resources have affected our approaches to deal with uncertainty in feedback control. The lecture will be illustrated by examples from process control and other application areas like automotive and power systems.

Penn ESE 531 Spring 2017 - Khanna

2

Lecture Outline

- Review: All Pass Systems
- Review: Minimum Phase Systems
- General Linear Phase Systems

Penn ESE 531 Spring 2017 – Khanna

3

Frequency Response of LTI System

$$Y(e^{j\omega}) = H(e^{j\omega})X(e^{j\omega})$$

- We can define a magnitude response

$$|Y(e^{j\omega})| = |H(e^{j\omega})||X(e^{j\omega})|$$

- And a phase response


$$\angle Y(e^{j\omega}) = \angle H(e^{j\omega}) + \angle X(e^{j\omega})$$

Penn ESE 531 Spring 2017 – Khanna

4

Example: Zero on Real Axis

- For $\theta \neq 0$

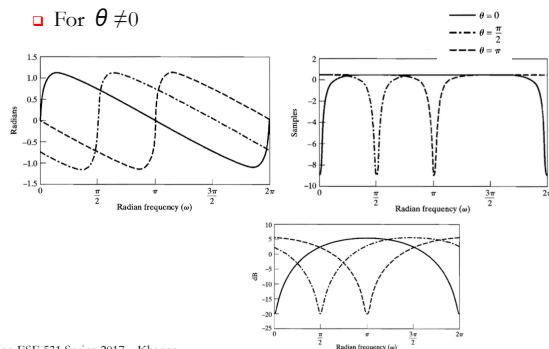


Penn ESE 531 Spring 2017 – Khanna

5

2nd Order IIR with Complex Poles

$$H(z) = \frac{1}{(1 - re^{j\theta}z^{-1})(1 - re^{-j\theta}z^{-1})} \quad r=0.9, \theta = \pi/4$$

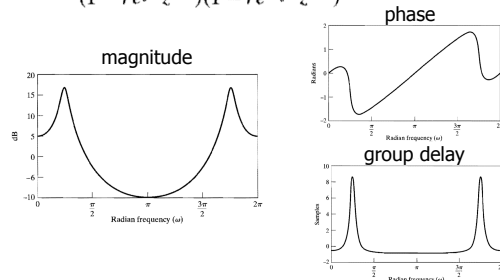


Penn ESE 531 Spring 2017 - Khanna

6

3rd Order IIR Example

$$H(z) = \frac{0.05634(1+z^{-1})(1-1.0166z^{-1}+z^{-2})}{(1-0.683z^{-1})(1-1.4461z^{-1}+0.7957z^{-2})}$$






Penn ESE 531 Spring 2017 - Khanna

7

3rd Order IIR Example

$$H(z) = \frac{0.05634(1+z^{-1})(1-1.0166z^{-1}+z^{-2})}{(1-0.683z^{-1})(1-1.4461z^{-1}+0.7957z^{-2})}$$



Penn ESE 531 Spring 2017 - Khanna

8

All-Pass Systems



Penn ESE 531 Spring 2017 - Khanna

All-Pass Filters

- A system is an all-pass system if

$$|H(e^{j\omega})| = 1, \text{ all } \omega$$

- Its phase response $\theta(\omega)$ may be non-trivial

Penn ESE 531 Spring 2017 - Khanna

10

General All-Pass Filter

- d_k =real pole, e_k =complex poles paired w/ conjugate, e_k^*

$$H_{ap}(z) = A \prod_{k=1}^{M_r} \frac{z^{-1} - d_k}{1 - d_k z^{-1}} \prod_{k=1}^{M_c} \frac{(z^{-1} - e_k^*)(z^{-1} - e_k)}{(1 - e_k z^{-1})(1 - e_k^* z^{-1})}$$

Penn ESE 531 Spring 2017 - Khanna

11

General All-Pass Filter


- d_k =real pole, e_k =complex poles paired w/ conjugate, e_k^*

$$H_{ap}(z) = A \prod_{k=1}^{M_r} \frac{z^{-1} - d_k}{1 - d_k z^{-1}} \prod_{k=1}^{M_c} \frac{(z^{-1} - e_k^*)(z^{-1} - e_k)}{(1 - e_k z^{-1})(1 - e_k^* z^{-1})}$$

- Example:

$$d_k = -\frac{3}{4}$$

$$e_k = 0.8e^{j\pi/4}$$



Real zero/pole
Complex zeros/poles

Penn ESE 531 Spring 2017 - Khanna

12

All Pass Filter Phase Response

First order system $H(e^{j\omega}) = \frac{e^{-j\omega} - a^*}{1 - ae^{-j\omega}}$

$$= \frac{e^{-j\omega} - re^{-j\theta}}{1 - re^{j\theta}e^{-j\omega}}$$

phase

Penn ESE 531 Spring 2017 - Khanna

13

All Pass Filter Phase Response

First order system $H(e^{j\omega}) = \frac{e^{-j\omega} - a^*}{1 - ae^{-j\omega}}$

$$= \frac{e^{-j\omega} - re^{-j\theta}}{1 - re^{j\theta}e^{-j\omega}}$$

phase $\arg\left(\frac{e^{-j\omega} - re^{-j\theta}}{1 - re^{j\theta}e^{-j\omega}}\right)$

$$= \arg\left(\frac{e^{-j\omega}(1 - re^{-j\theta}e^{j\omega})}{1 - re^{j\theta}e^{-j\omega}}\right)$$

$$= \arg(e^{-j\omega}) + \arg(1 - re^{-j\theta}e^{j\omega}) - \arg(1 - re^{j\theta}e^{-j\omega})$$

$$= -\omega - \arg(1 - re^{j\theta}e^{-j\omega}) - \arg(1 - re^{j\theta}e^{-j\omega})$$


$$= -\omega - 2\arg(1 - re^{j\theta}e^{-j\omega})$$

Penn ESE 531 Spring 2017 - Khanna

14

First Order Example

Magnitude:

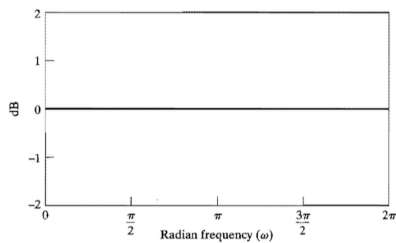


Penn ESE 531 Spring 2017 - Khanna

15

First Order Example

Phase:

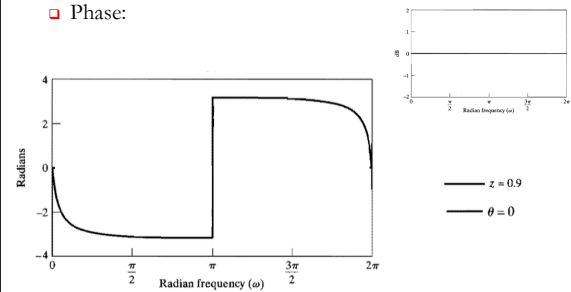


Penn ESE 531 Spring 2017 - Khanna

16

First Order Example

Group Delay:

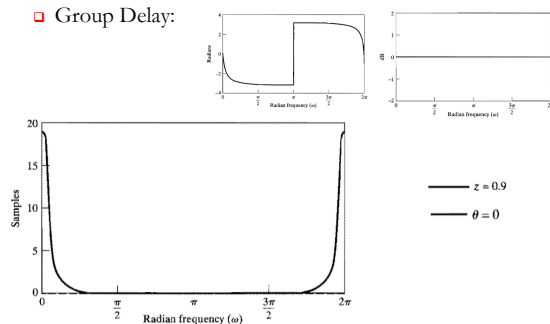

Penn ESE 531 Spring 2017 - Khanna

17

All Pass Filter Phase Response

Second order system with poles at $z = re^{j\theta}, re^{-j\theta}$

$$\angle \left[\frac{(e^{-j\omega} - re^{-j\theta})(e^{-j\omega} - re^{j\theta})}{(1 - re^{j\theta}e^{-j\omega})(1 - re^{-j\theta}e^{-j\omega})} \right] = -2\omega - 2 \arctan \left[\frac{r \sin(\omega - \theta)}{1 - r \cos(\omega - \theta)} \right]$$


$$- 2 \arctan \left[\frac{r \sin(\omega + \theta)}{1 - r \cos(\omega + \theta)} \right]$$

Penn ESE 531 Spring 2017 - Khanna

18

Second Order Example

- Poles at $z = 0.9e^{\pm j\pi/4}$ (zeros at conjugates)

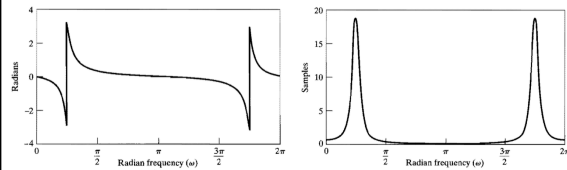

Penn ESE 531 Spring 2017 - Khanna

19

All-Pass Properties

- Claim: For a stable all-pass system:
 - $\arg[H_{ap}(e^{j\omega})] \leq 0$
 - Unwrapped phase always non-positive and decreasing
 - $\text{grd}[H_{ap}(e^{j\omega})] > 0$
 - Group delay always positive
- Intuition
 - delay is positive $\rightarrow$ system is causal
 - Phase negative $\rightarrow$ phase lag

Penn ESE 531 Spring 2017 - Khanna

20

Minimum-Phase Systems



Minimum-Phase Systems


- Definition: A stable and causal system $H(z)$ (i.e. poles inside unit circle) whose inverse $1/H(z)$ is also stable and causal (i.e. zeros inside unit circle)
 - All poles and zeros inside unit circle

Penn ESE 531 Spring 2017 - Khanna

22

Minimum-Phase Systems

- Definition: A stable and causal system $H(z)$ (i.e. poles inside unit circle) whose inverse $1/H(z)$ is also stable and causal (i.e. zeros inside unit circle)
 - All poles and zeros inside unit circle

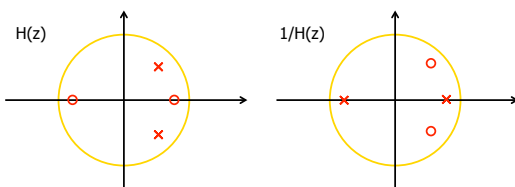

Penn ESE 531 Spring 2017 - Khanna

23

All-Pass Min-Phase Decomposition

- Any stable, causal system can be decomposed to:

$$H(z) = H_{\min}(z) \cdot H_{ap}(z)$$

- Approach:
 - (1) First construct H_{ap} with all zeros outside unit circle
 - (2) Compute


$$H_{\min}(z) = \frac{H(z)}{H_{ap}(z)}$$

Penn ESE 531 Spring 2017 - Khanna

24

Min-Phase Decomposition Example

$$H(z) = \frac{1-3z^{-1}}{1-\frac{1}{2}z^{-1}}$$



Penn ESE 531 Spring 2017 - Khanna


25

Min-Phase Decomposition Example

$$H(z) = \frac{1-3z^{-1}}{1-\frac{1}{2}z^{-1}}$$

□ Set $H_{ap}(z) = \frac{z^{-1} - \frac{1}{3}}{1 - \frac{1}{3}z^{-1}}$

$$H_{min}(z) = -3 \frac{1 - \frac{1}{3}z^{-1}}{1 - \frac{1}{2}z^{-1}}$$




Penn ESE 531 Spring 2017 - Khanna

26

Min-Phase Decomposition Purpose

- Have some distortion that we want to compensate for:




Penn ESE 531 Spring 2017 - Khanna

27

Min-Phase Decomposition Purpose

- Have some distortion that we want to compensate for:




- If $H_d(z)$ is min phase, easy:
 ■ $H_c(z) = 1/H_d(z)$ ← also stable and causal

Penn ESE 531 Spring 2017 - Khanna

28

Min-Phase Decomposition Purpose

- Have some distortion that we want to compensate for:




- If $H_d(z)$ is min phase, easy:
 ■ $H_c(z) = 1/H_d(z)$ ← also stable and causal
 □ Else, decompose $H_d(z) = H_{d,min}(z) H_{d,ap}(z)$
 ■ $H_c(z) = 1/H_{d,min}(z) \rightarrow H_d(z) H_c(z) = H_{d,ap}(z)$
 ■ Compensate for magnitude distortion

Penn ESE 531 Spring 2017 - Khanna

29

Minimum Energy-Delay Property

Min phase




Penn ESE 531 Spring 2017 - Khanna

30

Minimum Energy-Delay Property

Min phase



Max phase

Penn ESE 531 Spring 2017 - Khanna

31

Generalized Linear Phase Systems



Penn ESE 531 Spring 2017 - Khanna

32

Generalized Linear Phase

- An LTI system has generalized linear phase if frequency response $H(e^{j\omega})$ can be expressed as:

$$H(e^{j\omega}) = A(\omega)e^{-j\omega\alpha+j\beta}, \quad |\omega| < \pi$$

- Where $A(\omega)$ is a real function.

Penn ESE 531 Spring 2017 - Khanna

33

Generalized Linear Phase

- An LTI system has generalized linear phase if frequency response $H(e^{j\omega})$ can be expressed as:

$$H(e^{j\omega}) = A(\omega)e^{-j\omega\alpha+j\beta}, \quad |\omega| < \pi$$

- Where $A(\omega)$ is a real function.

- What is the group delay?

Penn ESE 531 Spring 2017 - Khanna

34

Causal FIR Systems

$$y[n] = b_0x[n] + b_1x[n-1] + \dots + b_Mx[n-M], \quad \text{all } n$$

$$H(z) = b_0 + b_1z^{-1} + \dots + b_Mz^{-M} = b_0 \prod_{k=1}^M (1 - c_kz^{-1})$$

$$h[n] = \begin{cases} b_n, & n = 0, 1, \dots, M \\ 0, & \text{otherwise} \end{cases}$$

Penn ESE 531 Spring 2017 - Khanna

35

Causal FIR Systems

- Causal FIR systems have generalized linear phase if they have impulse response length $(M+1)$
- It can be shown if

$$h[n] = \begin{cases} h[M-n], & 0 \leq n \leq M \\ 0, & \text{otherwise,} \end{cases}$$

- then

$$H(e^{j\omega}) = A_e(e^{j\omega})e^{-j\omega M/2},$$

Penn ESE 531 Spring 2017 - Khanna

36

Example: Moving Average

- Moving Average Filter

- Causal: $M_1=0, M_2=M$

$$y[n] = \frac{x[n-M] + \dots + x[n]}{M+1}$$

Impulse response



Penn ESE 531 Spring 2017 - Khanna

37

Example: Moving Average

- Moving Average Filter


- Causal: $M_1=0, M_2=M$

$$y[n] = \frac{x[n-M] + \dots + x[n]}{M+1}$$

Impulse response




Scaled & Time Shifted window



Penn ESE 531 Spring 2017 - Khanna

38

Example: Moving Average



$$w[n] \leftrightarrow W(e^{j\omega}) = \frac{\sin((N+1/2)\omega)}{\sin(\omega/2)}$$




$$\frac{1}{M+1} w[n-M/2] \leftrightarrow W(e^{j\omega}) = \frac{e^{-j\omega M/2}}{M+1} \frac{\sin((M/2+1/2)\omega)}{\sin(\omega/2)}$$

Penn ESE 531 Spring 2017 - Khanna

39

Example: Moving Average

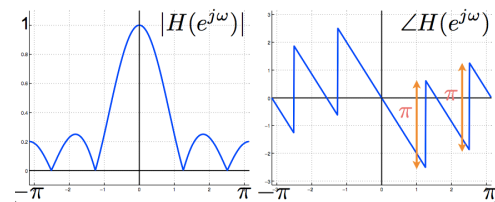

Penn ESE 531 Spring 2017 - Khanna

40

Causal FIR Systems

- Causal FIR systems have generalized linear phase if they have impulse response length $(M+1)$
- It can be shown if

$$h[n] = \begin{cases} h[M-n], & 0 \leq n \leq M, \\ 0, & \text{otherwise,} \end{cases}$$

- Then

$$H(e^{j\omega}) = A_e(e^{j\omega})e^{-j\omega M/2},$$

- Sufficient conditions to guarantee GLP, not necessary
 - Causal IIR can also have GLP


Penn ESE 531 Spring 2017 - Khanna

41

FIR GLP: Type I

Type I Even Symmetry, M even

$$h[n] = h[M-n], \quad n = 0, 1, \dots, M$$




Penn ESE 531 Spring 2017 - Khanna

42

FIR GLP: Type I

Type I Even Symmetry, M even

$$h[n] = h[M - n], \quad n = 0, 1, \dots, M$$



$$\text{Then } H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Even}} e^{-j\omega M/2}$$

integer delay


Penn ESE 531 Spring 2017 - Khanna

43

FIR GLP: Type I

Type I Even Symmetry, M even

$$h[n] = h[M - n], \quad n = 0, 1, \dots, M$$



$$\text{Then } H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Even}} e^{-j\omega M/2}$$

integer delay

$$H(e^{j\omega}) = e^{-j\omega M/2} \left(\sum_{k=0}^{M/2} a[k] \cos \omega k \right)$$

$$a[0] = h[M/2],$$

$$a[k] = 2h[(M/2) - k], \quad k = 1, 2, \dots, M/2.$$

Penn ESE 531 Spring 2017 - Khanna

44

FIR GLP: Type I – Example, $M=4$

Type I Even Symmetry, M even

$$h[n] = h[M - n], \quad n = 0, 1, \dots, M$$

$$\text{Then } H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Even}} e^{-j\omega M/2}$$

integer delay

$$\begin{aligned} H(e^{j\omega}) &= h[0] + h[1]e^{-j\omega} + h[2]e^{-j2\omega} + h[3]e^{-j3\omega} + h[4]e^{-j4\omega} \\ &= e^{-j2\omega} [h[0]e^{j2\omega} + h[1]e^{j\omega} + h[2] + h[1]e^{-j\omega} + h[0]e^{-j2\omega}] \\ &= \underbrace{[2h[0]\cos(2\omega) + 2h[1]\cos(\omega) + h[2]]}_{A(\omega) \text{ (even)}} e^{-j2\omega} \end{aligned}$$


Penn ESE 531 Spring 2017 - Khanna

45

FIR GLP: Type II

Type II Even Symmetry, M odd

$$h[n] = h[M - n], \quad n = 0, 1, \dots, M$$




Penn ESE 531 Spring 2017 - Khanna

46

FIR GLP: Type II

Type II Even Symmetry, M odd

$$h[n] = h[M - n], \quad n = 0, 1, \dots, M$$



$$\text{Then } H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Even}} e^{-j\omega M/2}$$

integer delay


Penn ESE 531 Spring 2017 - Khanna

47

FIR GLP: Type II

Type I Even Symmetry, M even

$$h[n] = h[M - n], \quad n = 0, 1, \dots, M$$



$$\text{Then } H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Even}} e^{-j\omega M/2}$$

integer delay

$$H(e^{j\omega}) = e^{-j\omega M/2} \left\{ \sum_{k=1}^{(M+1)/2} b[k] \cos \left[\omega \left(k - \frac{1}{2} \right) \right] \right\}$$

$$b[k] = 2h[(M+1)/2 - k], \quad k = 1, 2, \dots, (M+1)/2.$$

Penn ESE 531 Spring 2017 - Khanna

48

FIR GLP: Type II – Example, M=3

Type I Even Symmetry, M even

$$h[n] = h[M - n], \quad n = 0, 1, \dots, M$$

$$\text{Then } H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Even}} e^{-j\omega M/2} \quad \leftarrow \text{integer delay}$$



$$H(e^{j\omega}) = h[0] + h[1]e^{-j\omega} + h[2]e^{-j2\omega} + h[3]e^{-j3\omega}$$

$$H(e^{j\omega}) = \underbrace{[2h[0]\cos(3\omega/2) + 2h[1]\cos(\omega/2)]}_{A(\omega)} e^{-j3\omega/2}$$

Penn ESE 531 Spring 2017 - Khanna

49

FIR GLP: Type I and II




Penn ESE 531 Spring 2017 - Khanna

50

FIR GLP: Type III

Type III Odd Symmetry, M even

$$h[n] = -h[M - n], \quad n = 0, 1, \dots, M \quad (\text{note } h[M/2] = 0)$$




Penn ESE 531 Spring 2017 - Khanna

51

FIR GLP: Type III

Type III Odd Symmetry, M even

$$h[n] = -h[M - n], \quad n = 0, 1, \dots, M \quad (\text{note } h[M/2] = 0)$$



$$H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Odd}} e^{-j\omega M/2 + j\pi/2}$$

Penn ESE 531 Spring 2017 - Khanna

52

FIR GLP: Type III

Type III Odd Symmetry, M even

$$h[n] = -h[M - n], \quad n = 0, 1, \dots, M \quad (\text{note } h[M/2] = 0)$$

$$H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Odd}} e^{-j\omega M/2 + j\pi/2}$$

$$H(e^{j\omega}) = j e^{-j\omega M/2} \left[\sum_{k=1}^{M/2} c[k] \sin \omega k \right]$$

$$c[k] = 2h[(M/2) - k], \quad k = 1, 2, \dots, M/2.$$

Penn ESE 531 Spring 2017 - Khanna

53

FIR GLP: Type III – Example, M=4

Type III Odd Symmetry, M even

$$h[n] = -h[M - n], \quad n = 0, 1, \dots, M \quad (\text{note } h[M/2] = 0)$$

$$\begin{aligned} H(e^{j\omega}) &= \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Odd}} e^{-j\omega M/2 + j\pi/2} \\ H(e^{j\omega}) &= h[0] + h[1]e^{-j\omega} + h[2]e^{-j2\omega} + h[3]e^{-j3\omega} + h[4]e^{-j4\omega} \\ &= e^{-j2\omega} [h[0]e^{j2\omega} + h[1]e^{j\omega} - h[1]e^{-j\omega} - h[0]e^{-j2\omega}] \\ &= \underbrace{[2h[0]\sin(2\omega) + 2h[1]\sin(\omega)]}_{A(\omega) \text{ (odd)}} j e^{-j2\omega} \end{aligned}$$


Penn ESE 531 Spring 2017 - Khanna

54

FIR GLP: Type IV

Type IV Odd Symmetry, M Odd

$$h[n] = -h[M-n], \quad n = 0, 1, \dots, M \quad (M/2 \text{ not an integer})$$




Penn ESE 531 Spring 2017 - Khanna

55

FIR GLP: Type IV

Type IV Odd Symmetry, M Odd

$$h[n] = -h[M-n], \quad n = 0, 1, \dots, M \quad (M/2 \text{ not an integer})$$



$$H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Odd}} e^{-j\omega M/2 + j\pi/2} \quad \leftarrow \text{fractional delay}$$


Penn ESE 531 Spring 2017 - Khanna

56

FIR GLP: Type IV

Type IV Odd Symmetry, M Odd

$$h[n] = -h[M-n], \quad n = 0, 1, \dots, M \quad (M/2 \text{ not an integer})$$



$$H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Odd}} e^{-j\omega M/2 + j\pi/2} \quad \leftarrow \text{fractional delay}$$

$$H(e^{j\omega}) = j e^{-j\omega M/2} \left[\sum_{k=1}^{(M+1)/2} d[k] \sin \left[\omega \left(k - \frac{1}{2} \right) \right] \right]$$

$$d[k] = 2h[(M+1)/2 - k], \quad k = 1, 2, \dots, (M+1)/2.$$

Penn ESE 531 Spring 2017 - Khanna

57

FIR GLP: Type IV – Example, $M=3$

Type IV Odd Symmetry, M Odd

$$h[n] = -h[M-n], \quad n = 0, 1, \dots, M \quad (M/2 \text{ not an integer})$$


$$H(e^{j\omega}) = \sum_{n=0}^M h[n]e^{-j\omega n} = \underbrace{A(\omega)}_{\text{Real, Odd}} e^{-j\omega M/2 + j\pi/2} \quad \leftarrow \text{fractional delay}$$

$$H(e^{j\omega}) = \underbrace{[2h[0]\sin(3\omega/2) + 2h[1]\sin(\omega/2)]}_{A(\omega)} j e^{-j3\omega/2}$$

Penn ESE 531 Spring 2017 - Khanna

58

FIR GLP: Type III and IV

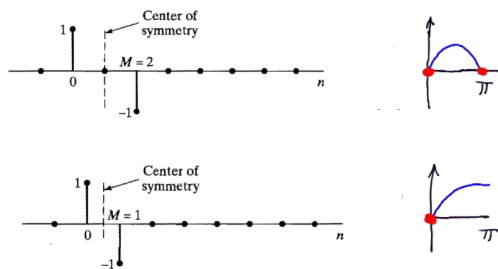

Penn ESE 531 Spring 2017 - Khanna

59

Zeros of GLP System – Type I and II

FIR GLP System Function

$$H(z) = \sum_{n=0}^M h[n]z^{-n}$$

Penn ESE 531 Spring 2017 - Khanna

60

Zeros of GLP System – Type I and II

- FIR GLP System Function

$$H(z) = \sum_{n=0}^M h[n]z^{-n}$$

$$H(z) = \sum_{n=0}^M h[M-n]z^{-n} = \sum_{k=M}^0 h[k]z^k z^{-M}$$

$$= z^{-M} H(z^{-1}).$$

If z_0 is a zero then z_0^{-1} is also a zero.

Penn ESE 531 Spring 2017 - Khanna

61

Zeros of GLP System – Type I and II

- FIR GLP System Function

$$H(z) = \sum_{n=0}^M h[n]z^{-n}$$

If z_0 is a zero then z_0^{-1} is also a zero.

- If $h[n]$ is real,

If z_0 is a zero then z_0^* is also a zero.

Penn ESE 531 Spring 2017 - Khanna

62

Zeros of GLP System – Type I and II

- FIR GLP System Function

$$H(z) = \sum_{n=0}^M h[n]z^{-n}$$

Real system → zeros occur in conjugate-reciprocal groups of 4

$$(1 - re^{j\theta}z^{-1})(1 - re^{-j\theta}z^{-1})(1 - r^{-1}e^{j\theta}z^{-1})(1 - r^{-1}e^{-j\theta}z^{-1})$$

Penn ESE 531 Spring 2017 - Khanna

63

Zeros of GLP System – Type I and II

- FIR GLP System Function

$$H(z) = \sum_{n=0}^M h[n]z^{-n}$$

Real system → zeros occur in conjugate-reciprocal groups of 4

$$(1 - re^{j\theta}z^{-1})(1 - re^{-j\theta}z^{-1})(1 - r^{-1}e^{j\theta}z^{-1})(1 - r^{-1}e^{-j\theta}z^{-1})$$

- If zero is on unit circle ($r=1$)

$$(1 - e^{j\theta}z^{-1})(1 - e^{-j\theta}z^{-1}).$$


- If zero is real and not on unit circle ($\theta=0$)

$$(1 \pm rz^{-1})(1 \pm r^{-1}z^{-1}).$$

Penn ESE 531 Spring 2017 - Khanna

64

Zeros of GLP System – Type I and II

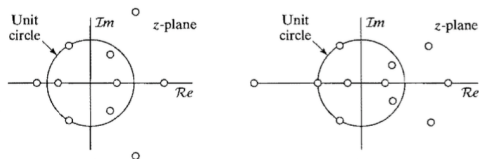

Penn ESE 531 Spring 2017 - Khanna

65

Zeros of GLP System – Type II

- FIR GLP System Function

$$H(z) = \sum_{n=0}^M h[M-n]z^{-n} = \sum_{k=M}^0 h[k]z^k z^{-M}$$

$$= z^{-M} H(z^{-1}).$$


Consider $z = -1$: $H(-1) = (-1)^{-M} H(-1)$

⇒ for M odd, $z = -1$ must be a zero (Type II)

Penn ESE 531 Spring 2017 - Khanna

66


Zeros of GLP System – Type I and II

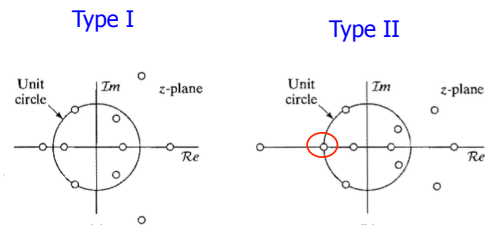

Penn ESE 531 Spring 2017 - Khanna

67

FIR GLP: Type I and II

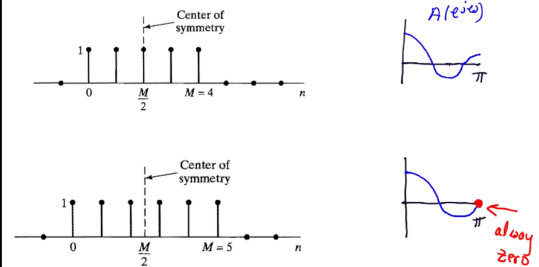

Penn ESE 531 Spring 2017 - Khanna

68

Zeros of GLP System – Type III and IV

□ FIR GLP System Function

$$H(z) = \sum_{n=0}^M h[n]z^{-n}$$

$$H(z) = -z^{-M} H(z^{-1}).$$

Penn ESE 531 Spring 2017 - Khanna

69

Zeros of GLP System – Type III and IV

□ FIR GLP System Function

$$H(z) = \sum_{n=0}^M h[n]z^{-n}$$

$$H(z) = -z^{-M} H(z^{-1}).$$

If z_0 is a zero then z_0^{-1} is also a zero.

Penn ESE 531 Spring 2017 - Khanna

70

Zeros of GLP System – Type III and IV

□ FIR GLP System Function

$$H(z) = \sum_{n=0}^M h[n]z^{-n}$$

Real system → zeros occur in conjugate-reciprocal groups of 4

$$(1 - re^{j\theta}z^{-1})(1 - re^{-j\theta}z^{-1})(1 - r^{-1}e^{j\theta}z^{-1})(1 - r^{-1}e^{-j\theta}z^{-1})$$

□ If zero is on unit circle ($r=1$)

$$(1 - e^{j\theta}z^{-1})(1 - e^{-j\theta}z^{-1}).$$


□ If zero is real and not on unit circle ($\theta=0$)

$$(1 \pm rz^{-1})(1 \pm r^{-1}z^{-1}).$$

Penn ESE 531 Spring 2017 - Khanna

71

Zeros of GLP System – Type III and IV

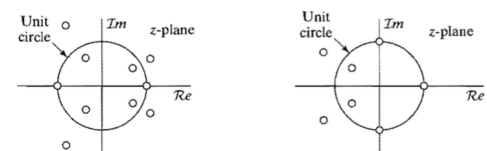

Penn ESE 531 Spring 2017 - Khanna

72

Zeros of GLP System – Type III and IV

- FIR GLP System Function

$$H(z) = -z^{-M} H(z^{-1}).$$

$$H(1) = -H(1) \Rightarrow z = 1 \text{ must be a zero}$$

$$H(-1) = (-1)^{-M+1} H(-1)$$


$\Rightarrow$ for M even, $z = -1$ must be a zero (Type III)

Penn ESE 531 Spring 2017 - Khanna


73

Zeros of GLP System – Type III and IV

Type III




Type IV



Penn ESE 531 Spring 2017 - Khanna

74

FIR GLP: Type III and IV

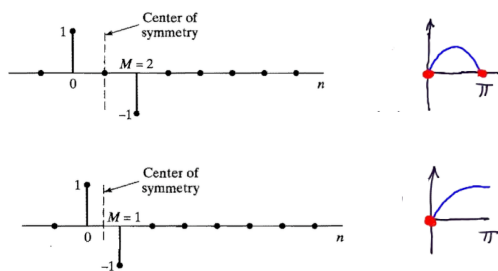

Penn ESE 531 Spring 2017 - Khanna

75

GLP and Min Phase Systems

- Any FIR linear-phase system can be decomposed into:

$$H(z) = H_{\min}(z) H_{\text{uc}}(z) H_{\max}(z)$$

- A min phase system, system containing only zeros on unit circle, and max phase system

Penn ESE 531 Spring 2017 - Khanna


76

GLP and Min Phase Systems

- Any FIR linear-phase system can be decomposed into:

$$H(z) =$$

- A min phase system with zeros on unit circle, and



Penn ESE 531 Spring 2017 - Khanna

77

Big Ideas

- Frequency Response of LTI Systems
 - Magnitude Response, Phase Response, Group Delay
- All Pass Systems
 - Used for delay compensation
- Minimum Phase Systems
 - Can compensate for magnitude distortion
 - Minimum energy-delay property
- Generalized Linear Phase Systems
 - Useful for design of causal FIR filters

Penn ESE 531 Spring 2017 - Khanna

78

Admin

- HW 6
 - Out now
 - Due Tuesday 3/28
 - No MATLAB problem
- Midterm returned on Thursday
 - Exam and solutions will be posted