

ESE 531: Digital Signal Processing

Lec 22: April 10, 2018
Adaptive Filters



Penn ESE 531 Spring 2018 – Khanna

Lecture Outline

- Circular convolution as linear convolution with aliasing
- Adaptive Filters

Penn ESE 531 Spring 2018 – Khanna

2

Circular Convolution

- Circular Convolution:

$$x_1[n] \circledast x_2[n] \triangleq \sum_{m=0}^{N-1} x_1[m]x_2[((n-m))_N]$$

For two signals of length N


Note: Circular convolution is commutative

$$x_2[n] \circledast x_1[n] = x_1[n] \circledast x_2[n]$$

Penn ESE 531 Spring 2018 – Khanna
Adapted from M. Lustig, EECS Berkeley

3

Compute Circular Convolution Sum

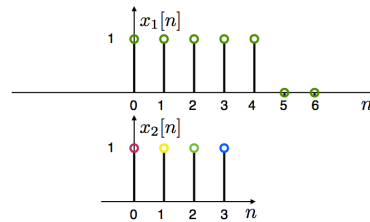


$$x_1[n] \circledast x_2[n] \triangleq \sum_{m=0}^{N-1} x_1[m]x_2[((n-m))_N]$$

Penn ESE 531 Spring 2018 – Khanna
Adapted from M. Lustig, EECS Berkeley

4

Compute Circular Convolution Sum

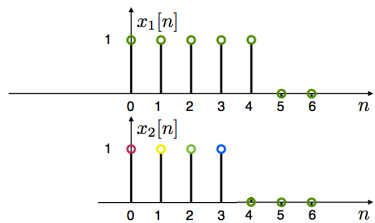


$$x_1[n] \circledast x_2[n] \triangleq \sum_{m=0}^{N-1} x_1[m]x_2[((n-m))_N]$$

Penn ESE 531 Spring 2018 – Khanna
Adapted from M. Lustig, EECS Berkeley

5

Compute Circular Convolution Sum

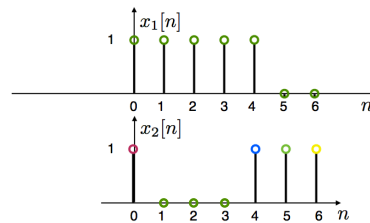


$$x_1[n] \circledast x_2[n] \triangleq \sum_{m=0}^{N-1} x_1[m]x_2[((n-m))_N]$$

Penn ESE 531 Spring 2018 – Khanna
Adapted from M. Lustig, EECS Berkeley

6

Compute Circular Convolution Sum

$y[0]=2$

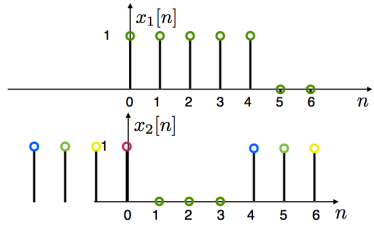


$$x_1[n] \otimes x_2[n] \triangleq \sum_{m=0}^{N-1} x_1[m]x_2[(n-m)_N]$$

Penn ESE 531 Spring 2018 – Khanna
Adapted from M. Lustig, EECS Berkeley

7

Compute Circular Convolution Sum

$y[0]=2$
 $y[1]=2$

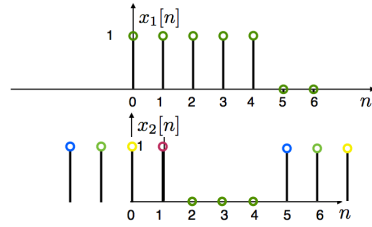


$$x_1[n] \otimes x_2[n] \triangleq \sum_{m=0}^{N-1} x_1[m]x_2[(n-m)_N]$$

Penn ESE 531 Spring 2018 – Khanna
Adapted from M. Lustig, EECS Berkeley

8

Compute Circular Convolution Sum

$y[0]=2$
 $y[1]=2$
 $y[2]=3$

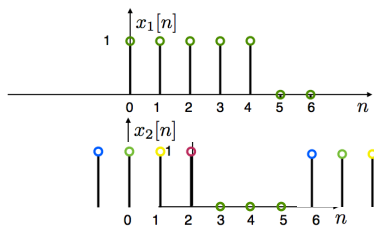


$$x_1[n] \otimes x_2[n] \triangleq \sum_{m=0}^{N-1} x_1[m]x_2[(n-m)_N]$$

Penn ESE 531 Spring 2018 – Khanna
Adapted from M. Lustig, EECS Berkeley

9

Compute Circular Convolution Sum

$y[0]=2$
 $y[1]=2$
 $y[2]=3$
 $y[3]=4$

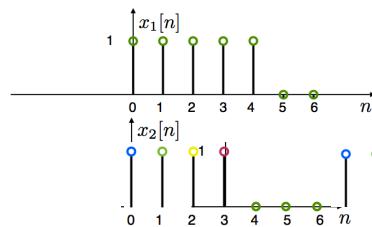


$$x_1[n] \otimes x_2[n] \triangleq \sum_{m=0}^{N-1} x_1[m]x_2[(n-m)_N]$$

Penn ESE 531 Spring 2018 – Khanna
Adapted from M. Lustig, EECS Berkeley

10

Result

$y[0]=2$
 $y[1]=2$
 $y[2]=3$
 $y[3]=4$

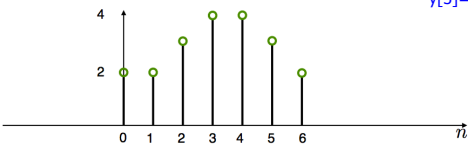

$$x_1[n] \otimes x_2[n] \triangleq \sum_{m=0}^{N-1} x_1[m]x_2[(n-m)_N]$$

Penn ESE 531 Spring 2018 – Khanna
Adapted from M. Lustig, EECS Berkeley

11

Linear Convolution

- We start with two non-periodic sequences:

$$x[n] \quad 0 \leq n \leq L-1$$

$$h[n] \quad 0 \leq n \leq P-1$$

- E.g. $x[n]$ is a signal and $h[n]$ a filter's impulse response
- We want to compute the linear convolution:

$$y[n] = x[n] * h[n] = \sum_{m=0}^{L-1} x[m]h[n-m]$$

- $y[n]$ is nonzero for $0 \leq n \leq L+P-2$ with length $M=L+P-1$

Requires LP multiplications

Penn ESE 531 Spring 2018 – Khanna
Adapted from M. Lustig, EECS Berkeley

12

Linear Convolution via Circular Convolution

- Zero-pad $x[n]$ by $P-1$ zeros

$$x_{zp}[n] = \begin{cases} x[n] & 0 \leq n \leq L-1 \\ 0 & L \leq n \leq L+P-2 \end{cases}$$

- Zero-pad $h[n]$ by $L-1$ zeros

$$h_{zp}[n] = \begin{cases} h[n] & 0 \leq n \leq P-1 \\ 0 & P \leq n \leq L+P-2 \end{cases}$$

- Now, both sequences are length $M=L+P-1$

Penn ESE 531 Spring 2018 - Khanna
Adapted from M. Lustig, EECS Berkeley

13

Circular Conv. via Linear Conv. w/ Aliasing

- If the DFT $X(e^{j\omega})$ of a sequence $x[n]$ is sampled at N frequencies $\omega_k = 2\pi k/N$, then the resulting sequence $X[k]$ corresponds to the periodic sequence

$$\tilde{x}[n] = \sum_{r=-\infty}^{\infty} x[n - rN].$$

- And $X[k] = \begin{cases} X(e^{j(2\pi k/N)}), & 0 \leq k \leq N-1, \\ 0, & \text{otherwise,} \end{cases}$ is the DFT of one period given as

$$x_p[n] = \begin{cases} \tilde{x}[n], & 0 \leq n \leq N-1, \\ 0, & \text{otherwise.} \end{cases}$$

Penn ESE 531 Spring 2018 - Khanna

14

Circular Conv. via Linear Conv. w/ Aliasing

$$x_p[n] = \begin{cases} \tilde{x}[n], & 0 \leq n \leq N-1, \\ 0, & \text{otherwise.} \end{cases}$$

- If $x[n]$ has length less than or equal to N , then $x_p[n] = x[n]$
- However if the length of $x[n]$ is greater than N , this might not be true and we get aliasing in time
 - N-point convolution results in N-point sequence

Penn ESE 531 Spring 2018 - Khanna

15

Circular Conv. via Linear Conv. w/ Aliasing

- Given two N-point sequences ($x_1[n]$ and $x_2[n]$) and their N-point DFTs ($X_1[k]$ and $X_2[k]$)
- The N-point DFT of $x_3[n] = x_1[n] * x_2[n]$ is defined as

$$X_3[k] = X_3(e^{j(2\pi k/N)})$$

Penn ESE 531 Spring 2018 - Khanna

16

Circular Conv. via Linear Conv. w/ Aliasing

- Given two N-point sequences ($x_1[n]$ and $x_2[n]$) and their N-point DFTs ($X_1[k]$ and $X_2[k]$)
- The N-point DFT of $x_3[n] = x_1[n] * x_2[n]$ is defined as

$$X_3[k] = X_3(e^{j(2\pi k/N)})$$

- And $X_3[k] = X_1[k]X_2[k]$, where the inverse DFT of $X_3[k]$ is

$$x_{3p}[n] = \begin{cases} \sum_{r=-\infty}^{\infty} x_3[n - rN], & 0 \leq n \leq N-1, \\ 0, & \text{otherwise,} \end{cases}$$

Penn ESE 531 Spring 2018 - Khanna

17

Circular Conv. as Linear Conv. w/ Aliasing

$$x_{3p}[n] = \begin{cases} \sum_{r=-\infty}^{\infty} x_3[n - rN], & 0 \leq n \leq N-1, \\ 0, & \text{otherwise,} \end{cases}$$

- Thus

$$x_{3p}[n] = x_1[n] \otimes x_2[n]$$

Penn ESE 531 Spring 2018 - Khanna

18

Circular Conv. as Linear Conv. w/ Aliasing

$$x_{3p}[n] = \begin{cases} \sum_{r=-\infty}^{\infty} x_3[n - rN], & 0 \leq n \leq N-1, \\ 0, & \text{otherwise,} \end{cases}$$

Thus

$$x_{3p}[n] = x_1[n] \otimes x_2[n]$$


The N -point circular convolution is the sum of linear convolutions shifted in time by N

Penn ESE 531 Spring 2018 - Khanna

19

Example 1:

Let




The $N=L=6$ -point circular convolution results in

Penn ESE 531 Spring 2018 - Khanna


20

Example 1:

Let



The $N=L=6$ -point circular convolution results in




Penn ESE 531 Spring 2018 - Khanna

21

Example 1:

Let




The linear convolution results in

Penn ESE 531 Spring 2018 - Khanna


22

Example 1:

Let



The linear convolution results in






Penn ESE 531 Spring 2018 - Khanna

23

Example 1:

The sum of N -shifted linear convolutions equals the N -point circular convolution




Penn ESE 531 Spring 2018 - Khanna

24

Example 1:

- The sum of N-shifted linear convolutions equals the N-point circular convolution

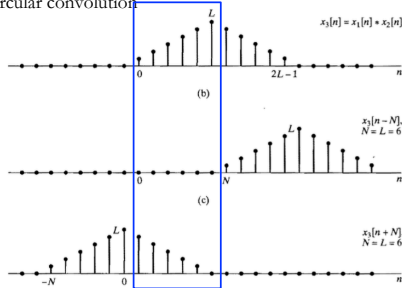


Penn ESE 531 Spring 2018 - Khanna

25

Example 1:

- The sum of N-shifted linear convolutions equals the N-point circular convolution

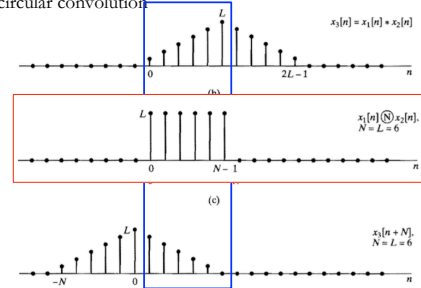

Penn ESE 531 Spring 2018 - Khanna

26

Example 1:


- If I want the circular convolution and linear convolution to be the same, what do I do?

Penn ESE 531 Spring 2018 - Khanna

27

Example 1:

- If I want the circular convolution and linear convolution to be the same, what do I do?
- Take the $N=2L$ -point circular convolution




Penn ESE 531 Spring 2018 - Khanna

28

Example 1:

- The sum of N-shifted linear convolutions equals the N-point circular convolution

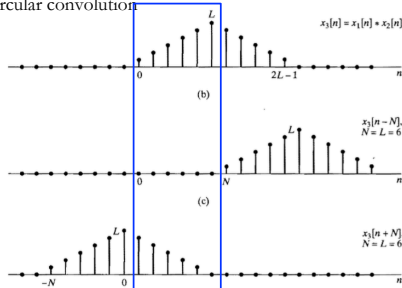


Penn ESE 531 Spring 2018 - Khanna

29

Example 2:

- Let





Penn ESE 531 Spring 2018 - Khanna


30

Example 2:

Let



Linear convolution



What does the L-point circular convolution look like?


Penn ESE 531 Spring 2018 - Khanna

31


Example 2:

Let

$$x_{3p}[n] = \begin{cases} x_1[n] \oplus x_2[n] = \sum_{r=-\infty}^{\infty} x_1[n-rL], & 0 \leq n \leq L-1, \\ 0, & \text{otherwise.} \end{cases}$$



Linear convolution






What does the L-point circular convolution look like?

Penn ESE 531 Spring 2018 - Khanna

32

Example 2:

The L-shifted linear convolutions






Penn ESE 531 Spring 2018 - Khanna

33

Example 2:

The L-shifted linear convolutions




Penn ESE 531 Spring 2018 - Khanna

34

Adaptive Filters

Adaptive Filters

- An adaptive filter is an adjustable filter that processes in time
 - It adapts...

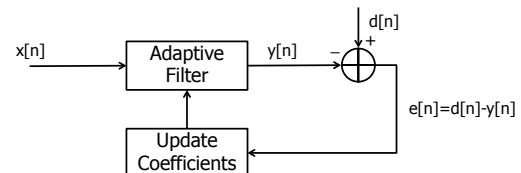

Penn ESE 531 Spring 2018 - Khanna




Penn ESE 531 Spring 2018 - Khanna

36

Adaptive Filter Applications

System Identification

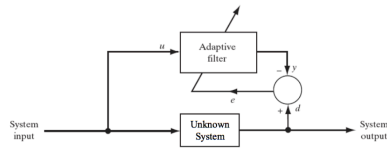


Penn ESE 531 Spring 2018 - Khanna

37

Adaptive Filter Applications

Identification of inverse system

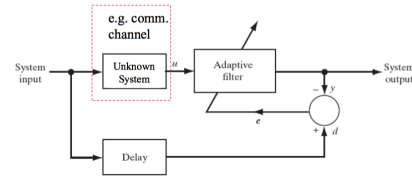


Penn ESE 531 Spring 2018 - Khanna

38

Adaptive Filter Applications

Adaptive Interference Cancellation

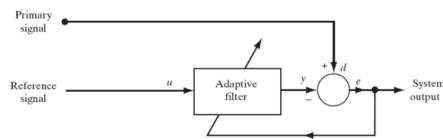


Penn ESE 531 Spring 2018 - Khanna

39

Adaptive Filter Applications

Adaptive Prediction

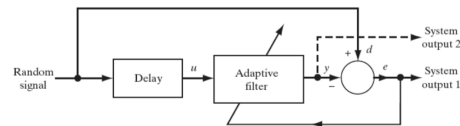

Penn ESE 531 Spring 2018 - Khanna

40


Stochastic Gradient Approach

- Most commonly used type of Adaptive Filters
- Define cost function as mean-squared error
 - Difference between filter output and desired response
- Based on the method of steepest descent
 - Move towards the minimum on the error surface to get to minimum
 - Requires the gradient of the error surface to be known

41

Least-Mean-Square (LMS) Algorithm


- The LMS Algorithm consists of two basic processes
 - Filtering process
 - Calculate the output of FIR filter by convolving input and taps
 - Calculate estimation error by comparing the output to desired signal

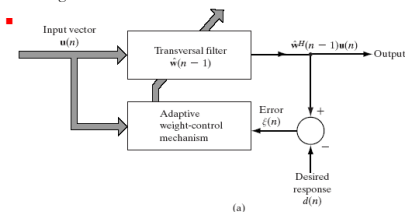

(a)

42


Adaptive FIR Filter: LMS

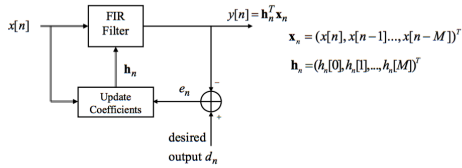

Penn ESE 531 Spring 2018 - Khanna

43


Adaptive FIR Filter: LMS

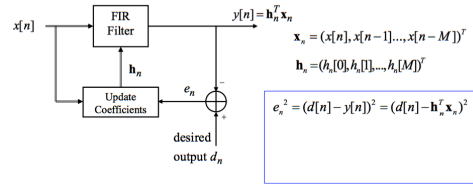

Penn ESE 531 Spring 2018 - Khanna

44


Adaptive FIR Filter: LMS

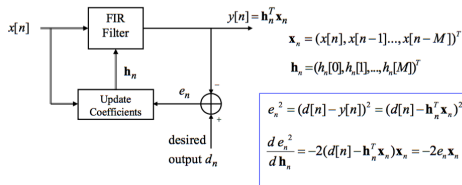

Penn ESE 531 Spring 2018 - Khanna

45

Adaptive FIR Filter: LMS

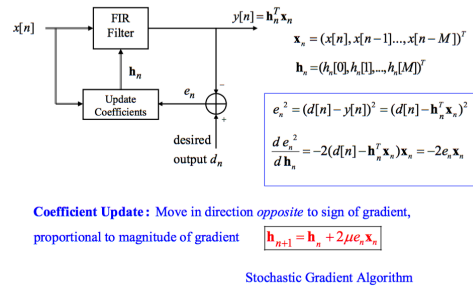


Penn ESE 531 Spring 2018 - Khanna

46

Adaptive Filter Applications


Adaptive Interference Cancellation

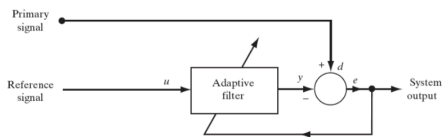

Penn ESE 531 Spring 2018 - Khanna

47


Adaptive Interference Cancellation



Penn ESE 531 Spring 2018 - Khanna

48


Adaptive Interference Cancellation

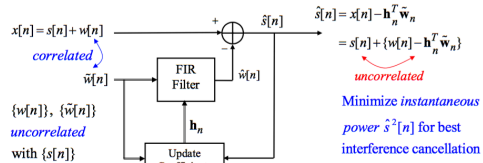

Penn ESE 531 Spring 2018 - Khanna

49

Adaptive Interference Cancellation

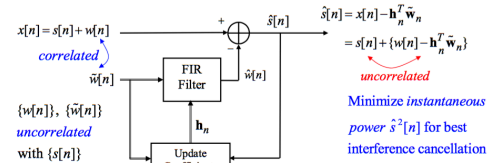

$$\frac{d(\hat{s}[n])^2}{d\mathbf{h}_n} = -2\hat{s}[n]\tilde{\mathbf{w}}_n \quad \boxed{\mathbf{h}_{n+1} = \mathbf{h}_n + 2\mu\hat{s}[n]\tilde{\mathbf{w}}_n}$$

Penn ESE 531 Spring 2018 - Khanna

50

Stability of LMS

- The LMS algorithm is convergent in the mean square if and only if the step-size parameter satisfy

$$0 < \mu < \frac{2}{\lambda_{\max}}$$

- Here $\lambda_{\max}$ is the largest eigenvalue of the correlation matrix of the input data

- More practical test for stability is

$$0 < \mu < \frac{2}{\text{input signal power}}$$

- Larger values for step size
 - Increases adaptation rate (faster adaptation)
 - Increases residual mean-squared error

51

Big Ideas

- Linear vs. Circular Convolution
 - Use circular convolution (i.e DFT) to perform fast linear convolution
 - Overlap-Add, Overlap-Save
 - Circular convolution is linear convolution with aliasing
- Adaptive Filters
 - Use LMS algorithm to update filter coefficients
 - applications like system ID, channel equalization, and signal prediction

Penn ESE 531 Spring 2018 - Khanna
Adapted from M. Lustig, EECS Berkeley

52

Admin

- Reminder:
 - Tania office hours cancelled tomorrow
- Project
 - Due 4/24

Penn ESE 531 Spring 2018 - Khanna
Adapted from M. Lustig, EECS Berkeley

53