

ESE 531: Digital Signal Processing

Lec 3: January 24, 2019
Discrete Time Signals and Systems



Lecture Outline

- Discrete Time Systems
- LTI Systems
- LTI System Properties
- Difference Equations


Discrete-Time Systems



Discrete Time Systems

A discrete-time **system** \mathcal{H} is a transformation (a rule or formula) that maps a discrete-time input signal x into a discrete-time output signal y

$$y = \mathcal{H}\{x\}$$



- Systems manipulate the information in signals
- Examples
 - Speech recognition system that converts acoustic waves into text
 - Radar system transforms radar pulse into position and velocity
 - fMRI system transform frequency into images of brain activity
 - Moving average system smooths out the day-to-day variability in a stock price


System Properties

- Causality
 - $y[n]$ only depends on $x[m]$ for $m \leq n$
- Linearity
 - Scaled sum of arbitrary inputs results in output that is a scaled sum of corresponding outputs
 - $Ax_1[n] + Bx_2[n] \rightarrow Ay_1[n] + By_2[n]$
- Memoryless
 - $y[n]$ depends only on $x[n]$
- Time Invariance
 - Shifted input results in shifted output
 - $x[n-q] \rightarrow y[n-q]$
- BIBO Stability
 - A bounded input results in a bounded output (ie. max signal value exists for output if max)


Stability

- BIBO Stability
 - Bounded-input bounded-output Stability

An LTI system is **bounded-input bounded-output (BIBO) stable** if a bounded input x always produces a bounded output y



- Bounded input and output means $\|x\|_\infty < \infty$ and $\|y\|_\infty < \infty$, or that there exist constants $A, C < \infty$ such that $|x[n]| < A$ and $|y[n]| < C$ for all n



Examples

- Causal? Linear? Time-invariant? Memoryless? BIBO Stable?
- Time Shift:
 - $y[n] = x[n - m]$
- Accumulator:
 - $$y[n] = \sum_{k=-\infty}^n x[k]$$
- Compressor ($M > 1$):
 - $y[n] = x[Mn]$

Penn ESE 531 Spring 2019 - Khanna

8

Non-Linear System Example


- Median Filter
 - $y[n] = \text{MED}\{x[n-k], \dots, x[n+k]\}$
 - Let $k=1$
 - $y[n] = \text{MED}\{x[n-1], x[n], x[n+1]\}$

Penn ESE 531 Spring 2019 - Khanna

9

Spectrum of Speech

Speech

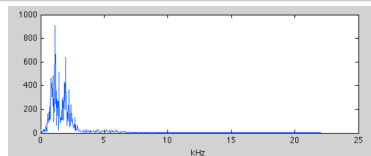


Penn ESE 531 Spring 2019 - Khanna


10

Spectrum of Speech

Speech

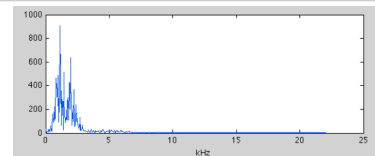


Corrupted Speech

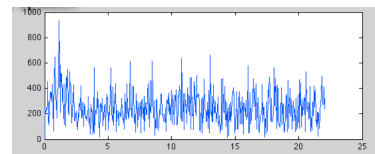

Penn ESE 531 Spring 2019 - Khanna

11

Low Pass Filtering

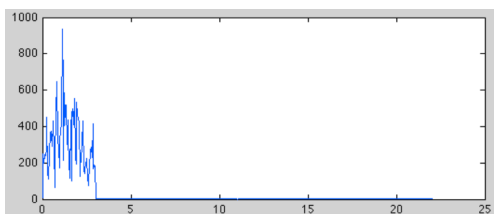


Penn ESE 531 Spring 2019 - Khanna


12

Low Pass Filtering

Corrupted Speech

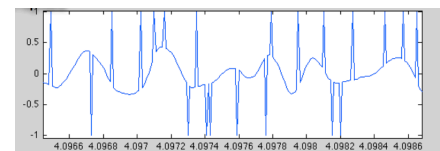

LP-Filtered Speech

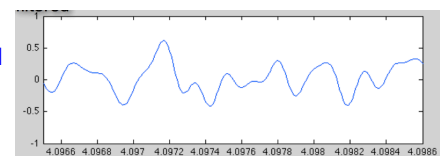


Penn ESE 531 Spring 2019 - Khanna


13

Median Filtering

Corrupted Speech

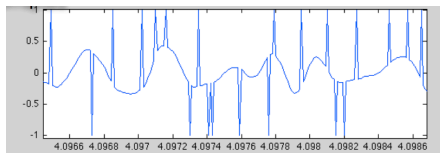

Med-Filter Speech

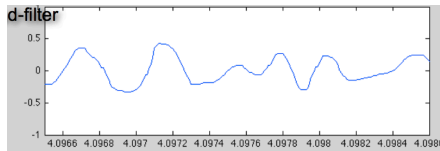

Penn ESE 531 Spring 2019 - Khanna

14

LTI Systems




Penn ESE 531 Spring 2019 - Khanna

LTI Systems

A system \mathcal{H} is **linear time-invariant (LTI)** if it is both linear and time-invariant

- LTI system can be completely characterized by its impulse response



- Then the output for an arbitrary input is a sum of weighted, delay impulse responses


$$x \rightarrow \boxed{h} \rightarrow y \quad y[n] = \sum_{m=-\infty}^{\infty} h[n-m] x[m]$$

$$y[n] = x[n] * h[n]$$

Penn ESE 531 Spring 2019 - Khanna

16

Convolution



- Convolution formula:

$$y[n] = x[n] * h[n] = \sum_{m=-\infty}^{\infty} h[n-m] x[m]$$

- Convolution method:


- 1) Time reverse the impulse response and shift it n time steps to the right
- 2) Compute the inner product between the shifted impulse response and the input vector
- Repeat for every n

Penn ESE 531 Spring 2019 - Khanna

Convolution Example

$$y[n] = x[n] * h[n] = \sum_{m=-\infty}^{\infty} h[n-m] x[m]$$

- Convolve a unit pulse with itself



Penn ESE 531 Spring 2019 - Khanna


18

Convolution is Commutative

- Convolution is commutative:

$$x * h = h * x$$

- These block diagrams are equivalent




- Implication: pick either h or x to flip and shift when convolving

Penn ESE 531 Spring 2019 - Khanna

19

LTI Systems in Series

- Impulse response of the cascade of two LTI systems:




Penn ESE 531 Spring 2019 - Khanna


20

LTI Systems in Series

- Impulse response of the cascade of two LTI systems:



- Proof by picture




Penn ESE 531 Spring 2019 - Khanna

21

LTI Systems in Parallel

- Impulse response of the parallel connection of two LTI systems:



Penn ESE 531 Spring 2019 - Khanna


22

Causal System Revisited

DEFINITION A system \mathcal{H} is **causal** if the output $y[n]$ at time n depends only the input $x[m]$ for times $m \leq n$. In words, causal systems do not look into the future

- An LTI system is causal if its impulse response is causal:

$$h[n] = 0 \text{ for } n < 0$$



Penn ESE 531 Spring 2019 - Khanna


23

Causal System Revisited

DEFINITION A system \mathcal{H} is **causal** if the output $y[n]$ at time n depends only the input $x[m]$ for times $m \leq n$. In words, causal systems do not look into the future

- An LTI system is causal if its impulse response is causal:

$$h[n] = 0 \text{ for } n < 0$$



- To prove, note that the convolution does not look into the future if the impulse response is causal

$$y[n] = \sum_{m=-\infty}^{\infty} h[n-m]x[m] \quad h[n-m] = 0 \text{ when } m > n,$$

Penn ESE 531 Spring 2019 - Khanna

24

Duration of Impulse

DEFINITION An LTI system has a **finite impulse response (FIR)** if the duration of its impulse response h is finite

Penn ESE 531 Spring 2019 - Khanna

25

Duration of Impulse

DEFINITION An LTI system has a **finite impulse response (FIR)** if the duration of its impulse response h is finite

□ Example: Moving average


$$y[n] = \mathcal{H}\{x[n]\} = \frac{1}{2} (x[n] + x[n-1])$$

Duration of Impulse

DEFINITION An LTI system has a **finite impulse response (FIR)** if the duration of its impulse response h is finite

□ Example: Moving average

$$y[n] = \mathcal{H}\{x[n]\} = \frac{1}{2} (x[n] + x[n-1])$$



Duration of Impulse

DEFINITION An LTI system has an **infinite impulse response (IIR)** if the duration of its impulse response h is infinite

Duration of Impulse

DEFINITION An LTI system has an **infinite impulse response (IIR)** if the duration of its impulse response h is infinite

□ Example: Recursive average


$$y[n] = \mathcal{H}\{x[n]\} = x[n] + \alpha y[n-1]$$

Duration of Impulse

DEFINITION An LTI system has an **infinite impulse response (IIR)** if the duration of its impulse response h is infinite


□ Example: Recursive average

$$y[n] = \mathcal{H}\{x[n]\} = x[n] + \alpha y[n-1]$$



BIBO Stability Revisited

DEFINITION An LTI system is **bounded-input bounded-output (BIBO) stable** if a bounded input x always produces a bounded output y



BIBO Stability Revisited

An LTI system is **bounded-input bounded-output (BIBO) stable** if a bounded input x always produces a bounded output y


bounded x \xrightarrow{h} bounded y

- Bounded input and output:

$$\|x\|_\infty < \infty \text{ and } \|y\|_\infty < \infty$$

- Where

$$\|x\|_\infty = \max |x[n]|$$



Penn ESE 531 Spring 2019 - Khanna

32


BIBO Stability Revisited

An LTI system is **bounded-input bounded-output (BIBO) stable** if a bounded input x always produces a bounded output y

bounded x \xrightarrow{h} bounded y

- Bounded input and output:

$$\|x\|_\infty < \infty \text{ and } \|y\|_\infty < \infty$$



- An LTI system is BIBO stable **if and only if**

$$\|h\|_1 = \sum_{n=-\infty}^{\infty} |h[n]| < \infty$$

Penn ESE 531 Spring 2019 - Khanna

33

BIBO Stability – Sufficient Condition

- Prove that if $\|h\|_1 < \infty$ then the system is BIBO stable – for any input $\|x\|_\infty < \infty$ the output $\|y\|_\infty < \infty$

Penn ESE 531 Spring 2019 - Khanna

34

BIBO Stability – Sufficient Condition

- Prove that if $\|h\|_1 < \infty$ then the system is BIBO stable – for any input $\|x\|_\infty < \infty$ the output $\|y\|_\infty < \infty$

- Recall that $\|x\|_\infty < \infty$ means there exist a constant A such that $|x[n]| < A < \infty$ for all n

- Let $\|h\|_1 = \sum_{n=-\infty}^{\infty} |h[n]| = B < \infty$

- Compute a bound on $|y[n]|$ using the convolution of x and h and the bounds A and B

$$\begin{aligned} |y[n]| &= \left| \sum_{m=-\infty}^{\infty} h[n-m] x[m] \right| \leq \sum_{m=-\infty}^{\infty} |h[n-m]| |x[m]| \\ &< \sum_{m=-\infty}^{\infty} |h[n-m]| A = A \sum_{k=-\infty}^{\infty} |h[k]| = AB = C < \infty \end{aligned}$$

- Since $|y[n]| < C < \infty$ for all n , $\|y\|_\infty < \infty$ ✓

Penn ESE 531 Spring 2019 - Khanna

35

BIBO Stability – Necessary Condition

- Prove that if $\|h\|_1 = \infty$ then the system is **not** BIBO stable – there exists an input $\|x\|_\infty < \infty$ such that the output $\|y\|_\infty = \infty$
 - Assume that x and h are real-valued; the proof for complex-valued signals is nearly identical


Penn ESE 531 Spring 2019 - Khanna

36

BIBO Stability – Necessary Condition

- Prove that if $\|h\|_1 = \infty$ then the system is **not** BIBO stable – there exists an input $\|x\|_\infty < \infty$ such that the output $\|y\|_\infty = \infty$
 - Assume that x and h are real-valued; the proof for complex-valued signals is nearly identical

- Given an impulse response h with $\|h\|_1 = \infty$ (assume complex-valued), form the tricky special signal $x[n] = \text{sgn}(h[-n])$
 - $x[n]$ is the \pm sign of the time-reversed impulse response $h[-n]$
 - Note that x is bounded: $|x[n]| \leq 1$ for all n

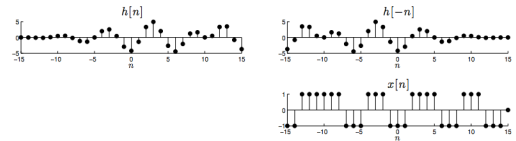

Penn ESE 531 Spring 2019 - Khanna

37

BIBO Stability – Necessary Condition

- We are proving that that if $\|h\|_1 = \infty$ then the system is not BIBO stable – there exists an input $\|x\|_\infty < \infty$ such that the output $\|y\|_\infty = \infty$
- Armed with the tricky special signal x , compute the output $y[n]$ at the time point $n = 0$

$$\begin{aligned} y[0] &= \sum_{m=-\infty}^{\infty} h[0-m] x[m] = \sum_{m=-\infty}^{\infty} h[-m] \operatorname{sgn}(h[-m]) \\ &= \sum_{m=-\infty}^{\infty} |h[-m]| = \sum_{k=-\infty}^{\infty} |h[k]| = \|h\|_1 = \infty \end{aligned}$$


- So, even though x was bounded, y is not bounded; so system is not BIBO stable

Penn ESE 531 Spring 2019 - Khanna

38

Examples

- Example: $h[n] = \begin{cases} \frac{1}{n} & n \geq 1 \\ 0 & \text{otherwise} \end{cases}$
 $\|h\|_1 = \sum_{n=1}^{\infty} \left| \frac{1}{n} \right| = \infty \Rightarrow \text{not BIBO}$
- Example: $h[n] = \begin{cases} \frac{1}{n^2} & n \geq 1 \\ 0 & \text{otherwise} \end{cases}$
 $\|h\|_1 = \sum_{n=1}^{\infty} \left| \frac{1}{n^2} \right| = \frac{\pi^2}{6} \Rightarrow \text{BIBO}$




Penn ESE 531 Spring 2019 - Khanna

39

Examples

- Example: $h[n] = \begin{cases} \frac{1}{n} & n \geq 1 \\ 0 & \text{otherwise} \end{cases}$
 $\|h\|_1 = \sum_{n=1}^{\infty} \left| \frac{1}{n} \right| = \infty \Rightarrow \text{not BIBO}$
- Example: $h[n] = \begin{cases} \frac{1}{n^2} & n \geq 1 \\ 0 & \text{otherwise} \end{cases}$
 $\|h\|_1 = \sum_{n=1}^{\infty} \left| \frac{1}{n^2} \right| = \frac{\pi^2}{6} \Rightarrow \text{BIBO}$
- Example: h FIR \Rightarrow BIBO



Penn ESE 531 Spring 2019 - Khanna

40

Example


- Example: Recall the recursive average system $y[n] = \mathcal{H}\{x[n]\} = x[n] + \alpha y[n-1]$
- Impulse response: $h[n] = \alpha^n u[n]$

Penn ESE 531 Spring 2019 - Khanna

41

Example

- Example: Recall the recursive average system $y[n] = \mathcal{H}\{x[n]\} = x[n] + \alpha y[n-1]$
- Impulse response: $h[n] = \alpha^n u[n]$
- For $|\alpha| < 1$
 $\|h\|_1 = \sum_{n=0}^{\infty} |\alpha|^n = \frac{1}{1-|\alpha|} < \infty \Rightarrow \text{BIBO}$
- For $|\alpha| > 1$
 $\|h\|_1 = \sum_{n=0}^{\infty} |\alpha|^n = \infty \Rightarrow \text{not BIBO}$



Penn ESE 531 Spring 2019 - Khanna

42

Difference Equations

- Accumulator example

$$\begin{aligned} y[n] &= \sum_{k=-\infty}^n x[k] \\ y[n] &= x[n] + \sum_{k=-\infty}^{n-1} x[k] \\ y[n] &= x[n] + y[n-1] \\ y[n] - y[n-1] &= x[n] \end{aligned}$$

Penn ESE 531 Spring 2019 - Khanna

43

Difference Equations

- Accumulator example

$$y[n] = \sum_{k=-\infty}^n x[k]$$

$$y[n] = x[n] + \sum_{k=-\infty}^{n-1} x[k]$$

$$y[n] = x[n] + y[n-1]$$

$$y[n] - y[n-1] = x[n]$$

$$\sum_{k=0}^N a_k y[n-k] = \sum_{m=0}^M b_m x[n-m]$$

Penn ESE 531 Spring 2019 - Khanna

44

Difference Equations

- Accumulator example


$$y[n] = \sum_{k=-\infty}^n x[k]$$

$$y[n] = x[n] + \sum_{k=-\infty}^{n-1} x[k]$$

$$y[n] = x[n] + y[n-1]$$

$$y[n] - y[n-1] = x[n]$$

$$\sum_{k=0}^N a_k y[n-k] = \sum_{m=0}^M b_m x[n-m]$$



Penn ESE 531 Spring 2019 - Khanna

45

Example: Difference Equation

- Moving Average System

$$y[n] = \frac{1}{M_1 + M_2 + 1} \sum_{k=-M_1}^{M_2} x[n-k]$$

- Let $M_1=0$ (i.e. system is causal)

$$y[n] = \frac{1}{M_2 + 1} \sum_{k=0}^{M_2} x[n-k]$$

Penn ESE 531 Spring 2019 - Khanna

46

Big Ideas

- LTI Systems are a special class of systems with significant signal processing applications
 - Can be characterized by the impulse response
- LTI System Properties
 - Causality and stability can be determined from impulse response
- Difference equations suggest implementation of systems
 - Give insight into complexity of system

Penn ESE 531 Spring 2019 - Khanna

47

Admin

- HW 1 posted tomorrow
 - Due 2/3 at midnight
 - Submit in Canvas

Penn ESE 531 Spring 2019 - Khanna

48