

# ESE 531: Digital Signal Processing

---

Lec 3: January 23, 2020

Discrete Time Signals and Systems



# Lecture Outline

---

- ❑ Discrete Time Systems
- ❑ LTI Systems
- ❑ LTI System Properties
- ❑ Difference Equations

# Discrete-Time Systems


---



# Discrete Time Systems

DEFINITION

A discrete-time **system**  $\mathcal{H}$  is a transformation (a rule or formula) that maps a discrete-time input signal  $x$  into a discrete-time output signal  $y$

$$y = \mathcal{H}\{x\}$$


- ❑ Systems manipulate the information in signals
- ❑ Examples
  - Speech recognition system that converts acoustic waves into text
  - Radar system transforms radar pulse into position and velocity
  - fMRI system transform frequency into images of brain activity
  - Moving average system smooths out the day-to-day variability in a stock price



# System Properties

---

## ❑ Causality

- $y[n]$  only depends on  $x[m]$  for  $m \leq n$

## ❑ Linearity

- Scaled sum of arbitrary inputs results in output that is a scaled sum of corresponding outputs
  - $Ax_1[n] + Bx_2[n] \rightarrow Ay_1[n] + By_2[n]$

## ❑ Memoryless

- $y[n]$  depends only on  $x[n]$

## ❑ Time Invariance

- Shifted input results in shifted output
  - $x[n-q] \rightarrow y[n-q]$

## ❑ BIBO Stability

- A bounded input results in a bounded output (ie. max signal value exists for output if max)


# Stability

## □ BIBO Stability




### ■ Bounded-input bounded-output Stability

DEFINITION

An LTI system is **bounded-input bounded-output (BIBO) stable** if a bounded input  $x$  always produces a bounded output  $y$



- Bounded input and output means  $\|x\|_{\infty} < \infty$  and  $\|y\|_{\infty} < \infty$ ,  
or that there exist constants  $A, C < \infty$  such that  $|x[n]| < A$  and  $|y[n]| < C$  for all  $n$

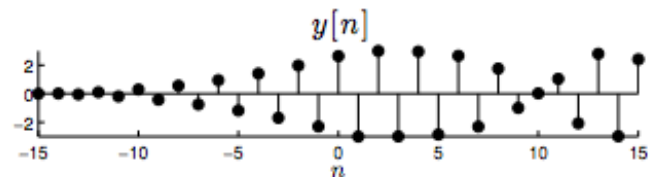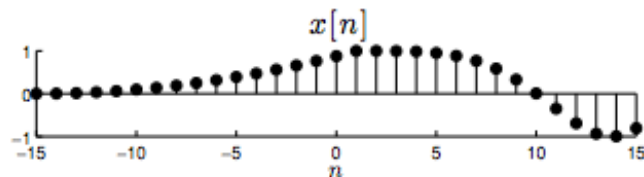



# Examples

---

□ Causal? Linear? Time-invariant? Memoryless?  
BIBO Stable?

□ Time Shift:

- $y[n] = x[n - m]$

□ Accumulator:

- $$y[n] = \sum_{k=-\infty}^n x[k]$$

□ Compressor ( $M > 1$ ):

$$y[n] = x[Mn]$$



# Non-Linear System Example

---

## □ Median Filter

- $y[n] = \text{MED} \{x[n-k], \dots, x[n+k]\}$
- Let  $k=1$
- $y[n] = \text{MED} \{x[n-1], x[n], x[n+1]\}$






# Spectrum of Speech


---

Speech

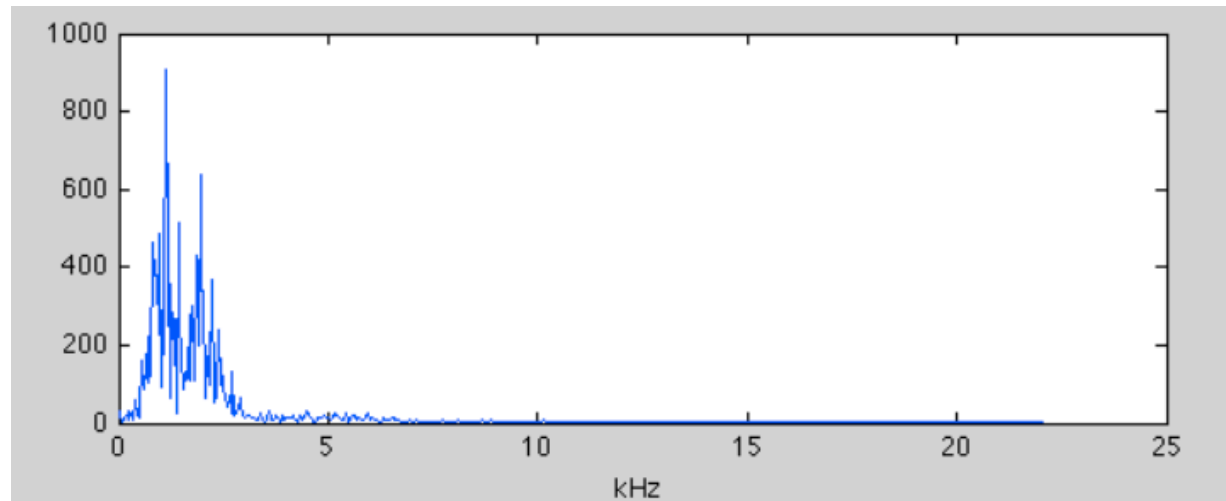


# Spectrum of Speech


Speech

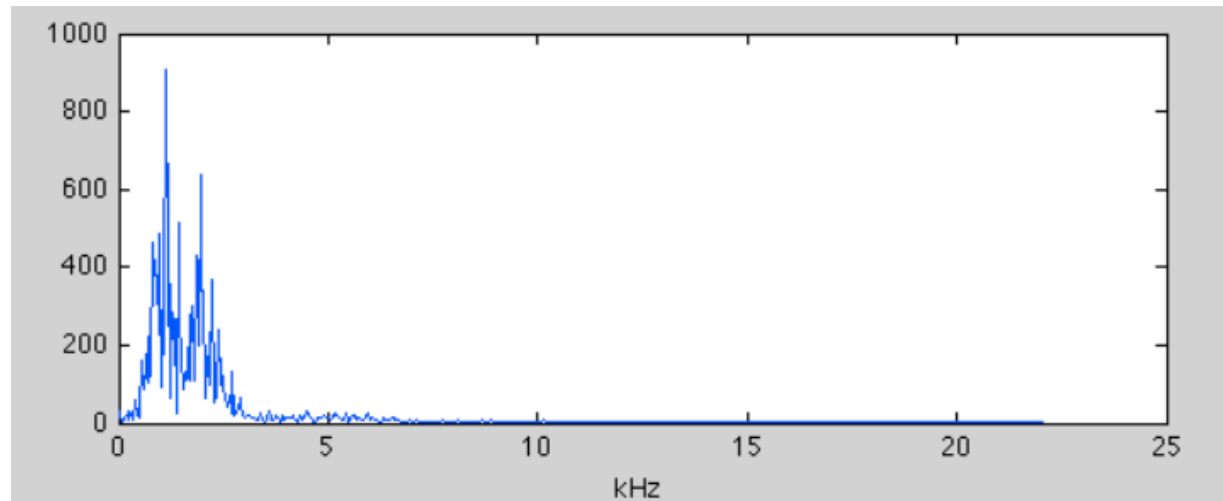

Corrupted  
Speech

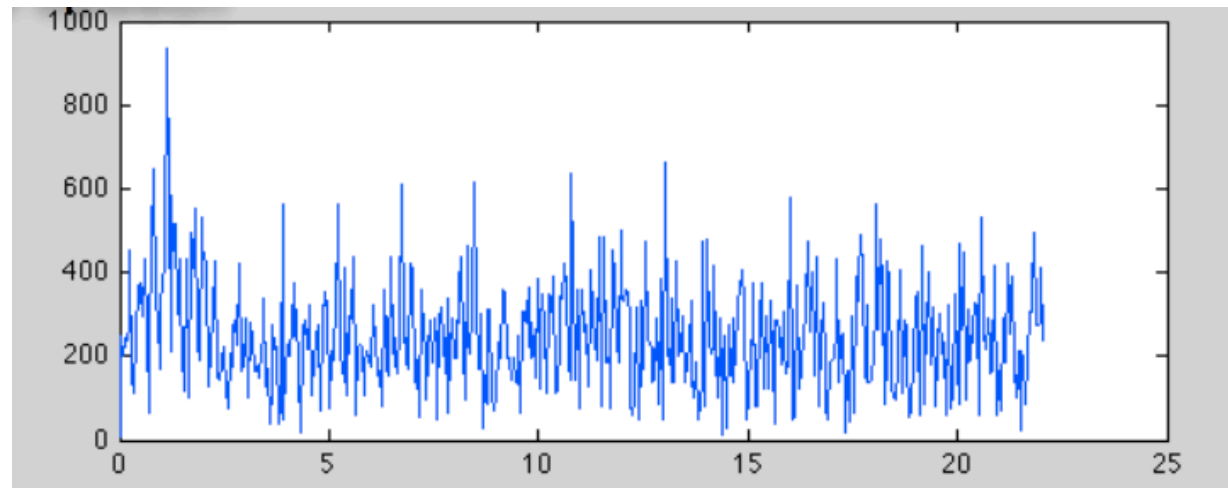


# Low Pass Filtering

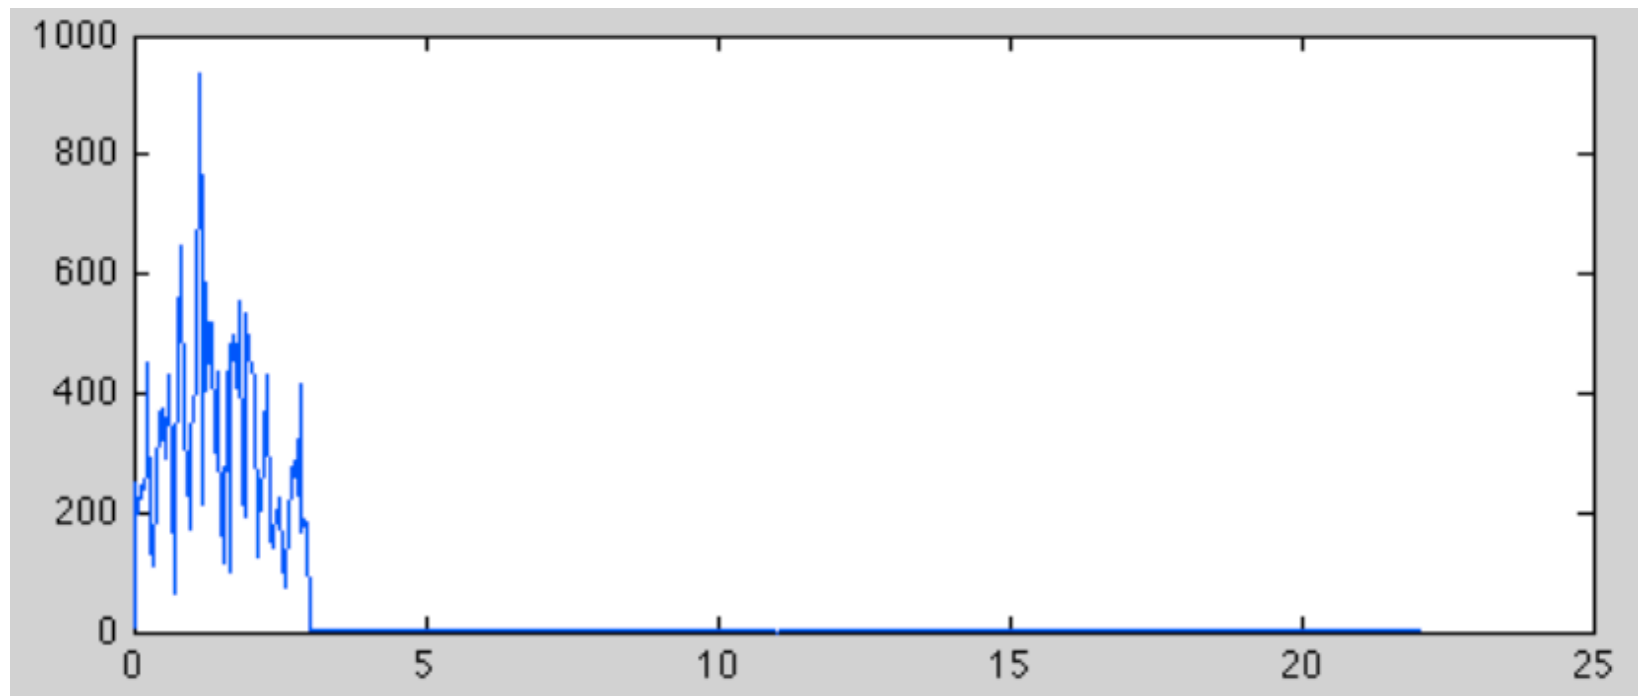


# Speech in Time

Corrupted  
Speech

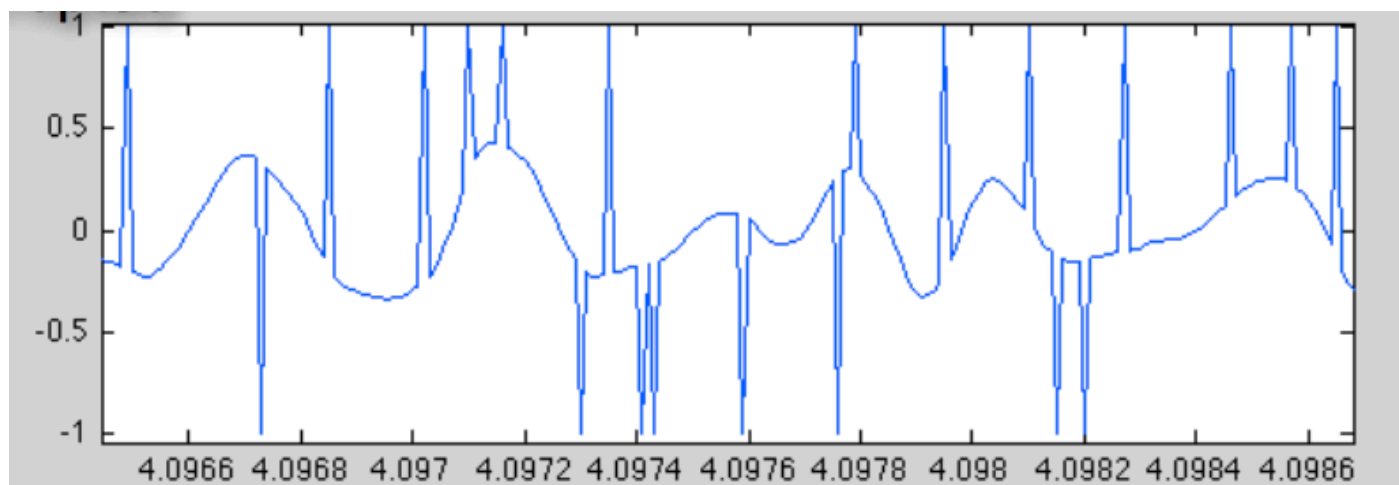


# Low Pass Filtering

Corrupted  
Speech

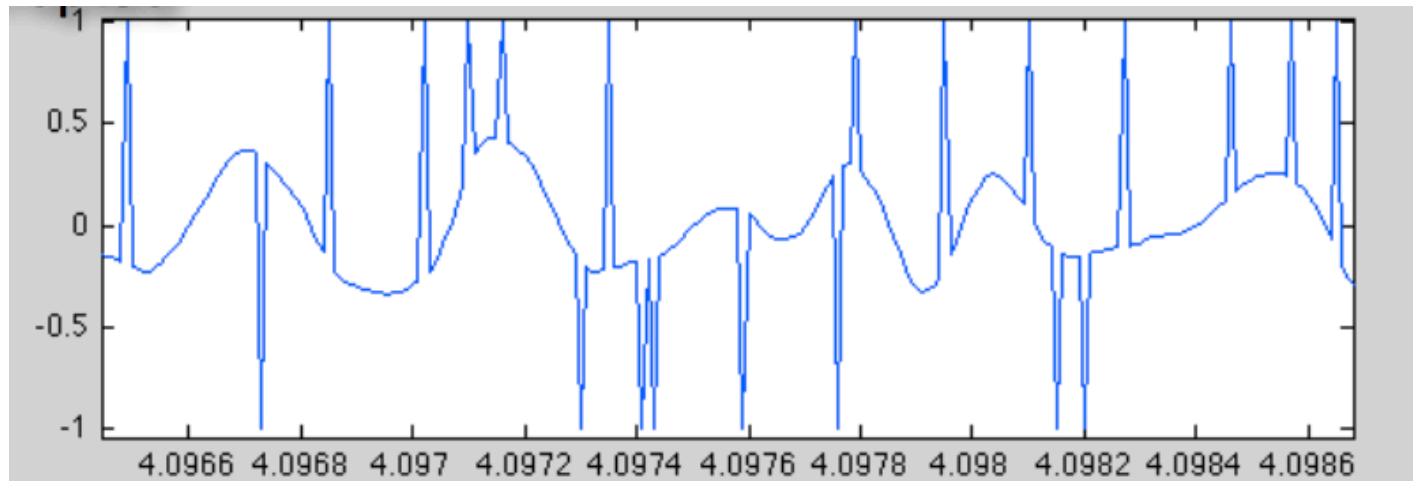


LP-Filtered  
Speech

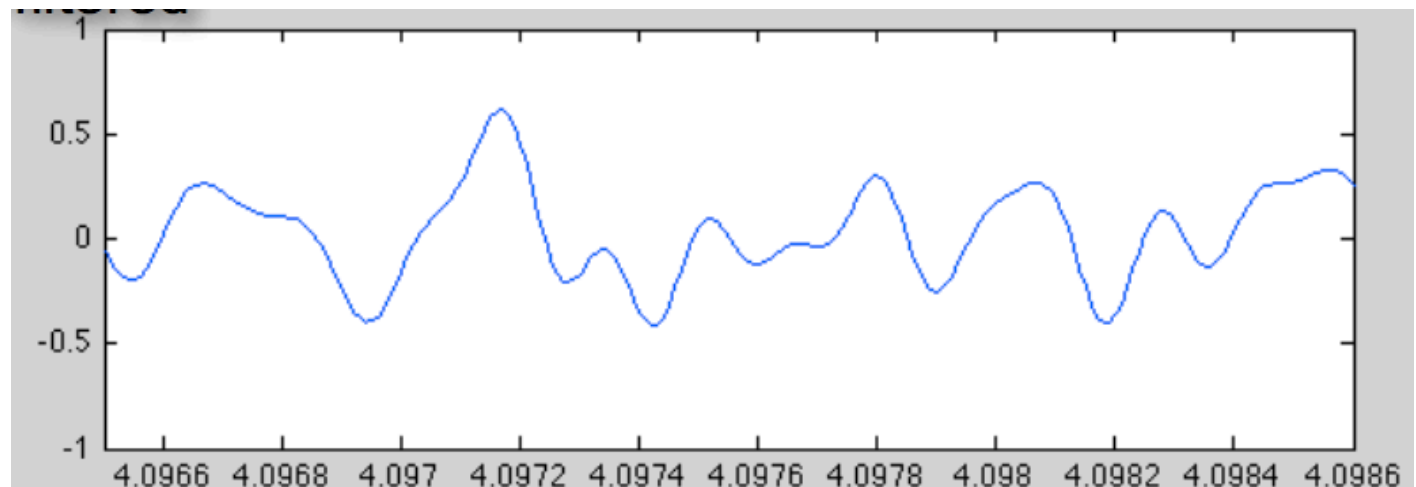




# Median Filtering

Corrupted  
Speech

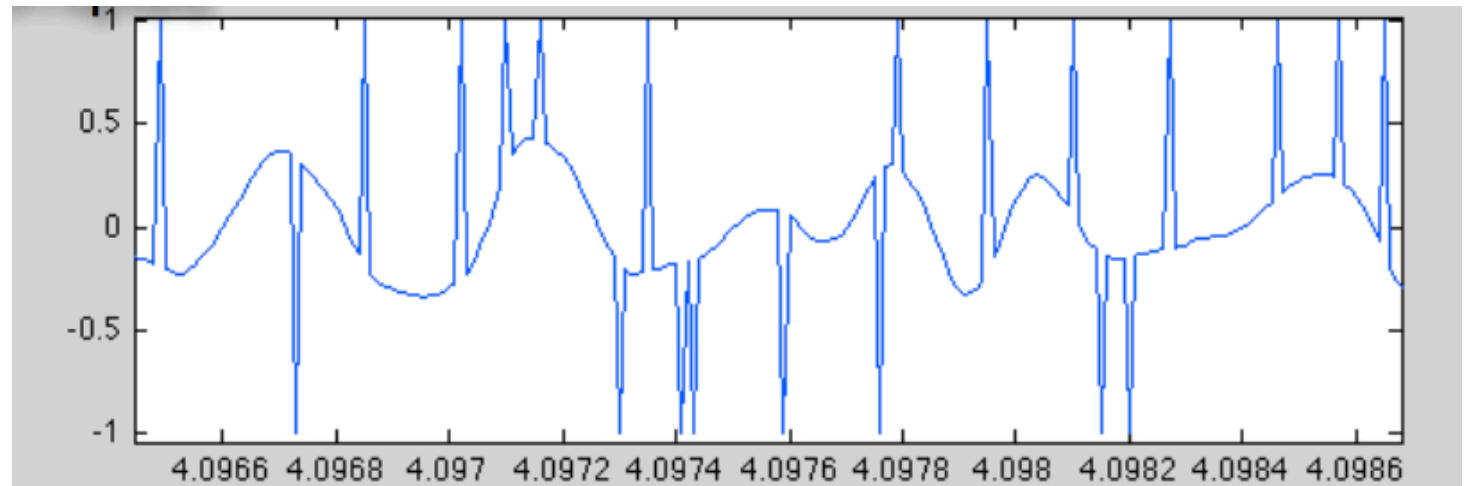

Med-Filter  
Speech

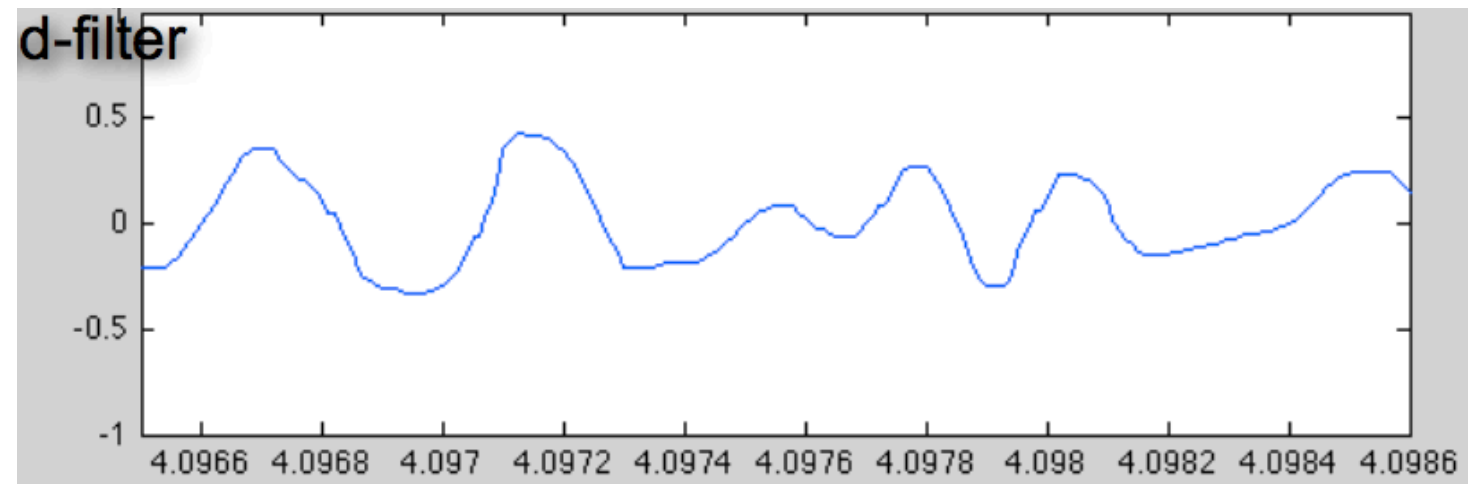

# LTI Systems


---

# LTI Systems

DEFINITION

A system  $\mathcal{H}$  is **linear time-invariant** (LTI) if it is both linear and time-invariant

- LTI system can be completely characterized by its impulse response



- Then the output for an arbitrary input is a sum of weighted, delay impulse responses


A block diagram showing a general input-output relationship. An input signal  $x$  enters a rectangular block labeled  $h$ , and the output is  $y$ .

$$y[n] = \sum_{m=-\infty}^{\infty} h[n-m] x[m]$$

$$y[n] = x[n] * h[n]$$



# Convolution



- Convolution formula:

$$y[n] = x[n] * h[n] = \sum_{m=-\infty}^{\infty} h[n-m] x[m]$$


- Convolution method:

- 1) Time reverse the impulse response and shift it  $n$  time steps to the right
- 2) Compute the inner product between the shifted impulse response and the input vector
- Repeat for every  $n$

# Convolution Example

$$y[n] = x[n] * h[n] = \sum_{m=-\infty}^{\infty} h[n-m] x[m]$$

- Convolve a unit pulse with itself

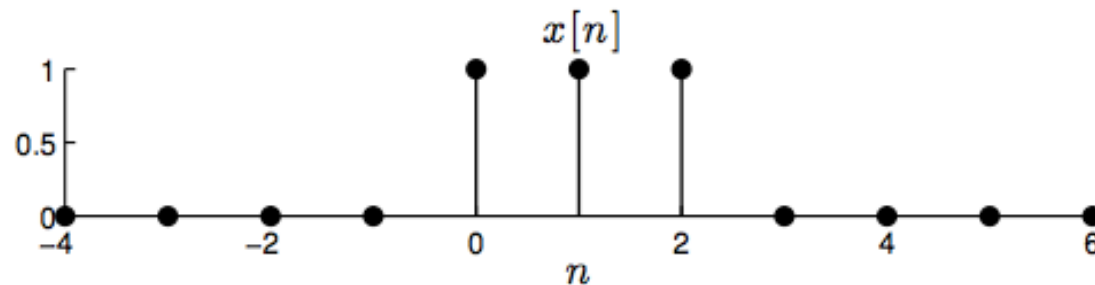

# Convolution is Commutative

- Convolution is commutative:

$$x * h = h * x$$


- These block diagrams are equivalent



- Implication: pick either  $h$  or  $x$  to flip and shift when convolving



# LTI Systems in Series

- Impulse response of the cascade of two LTI systems:

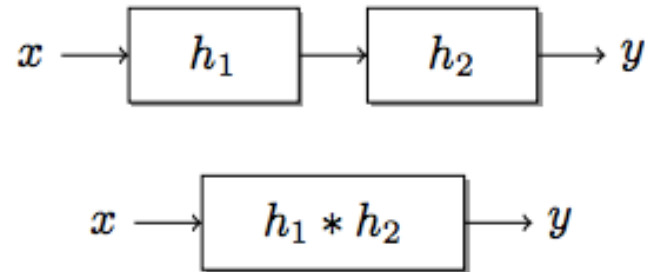


# LTI Systems in Series

- Impulse response of the cascade of two LTI systems:




- Proof by picture



# LTI Systems in Parallel

- Impulse response of the parallel connection of two LTI systems:

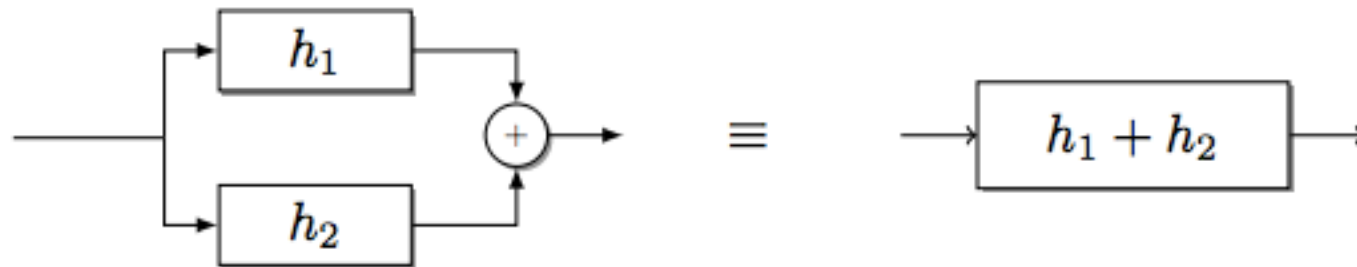


# Causal System Revisited

DEFINITION

A system  $\mathcal{H}$  is **causal** if the output  $y[n]$  at time  $n$  depends only the input  $x[m]$  for times  $m \leq n$ . In words, causal systems do not look into the future

- An LTI system is causal if its impulse response is causal:

$$h[n] = 0 \text{ for } n < 0$$

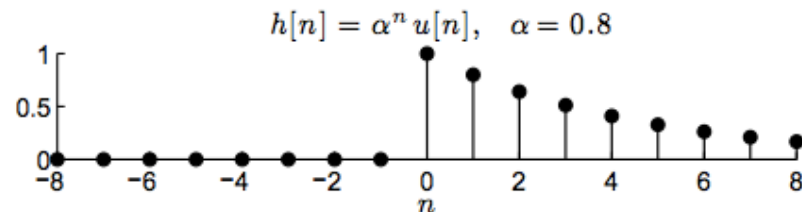


# Causal System Revisited

DEFINITION

A system  $\mathcal{H}$  is **causal** if the output  $y[n]$  at time  $n$  depends only the input  $x[m]$  for times  $m \leq n$ . In words, causal systems do not look into the future

- An LTI system is causal if its impulse response is causal:


$$h[n] = 0 \text{ for } n < 0$$

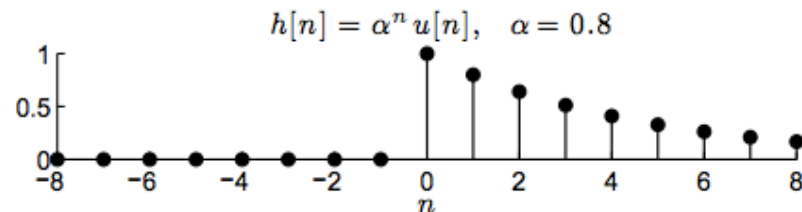

- To prove, note that the convolution does not look into the future if the impulse response is causal

$$y[n] = \sum_{m=-\infty}^{\infty} h[n-m] x[m] \qquad h[n-m] = 0 \text{ when } m > n;$$





# Duration of Impulse

---

## DEFINITION

An LTI system has a **finite impulse response** (FIR) if the duration of its impulse response  $h$  is finite



# Duration of Impulse

---

DEFINITION

An LTI system has a **finite impulse response** (FIR) if the duration of its impulse response  $h$  is finite

- Example: Moving average

$$y[n] = \mathcal{H}\{x[n]\} = \frac{1}{2} (x[n] + x[n-1])$$


# Duration of Impulse


DEFINITION

An LTI system has a **finite impulse response (FIR)** if the duration of its impulse response  $h$  is finite

- Example: Moving average

$$y[n] = \mathcal{H}\{x[n]\} = \frac{1}{2} (x[n] + x[n-1])$$

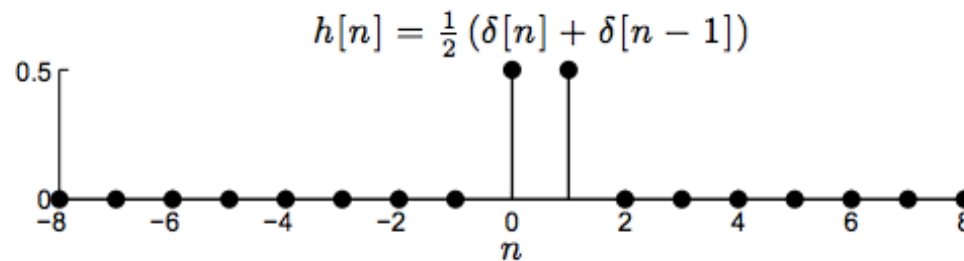



# Duration of Impulse

---

## DEFINITION

An LTI system has an **infinite impulse response (IIR)** if the duration of its impulse response  $h$  is infinite



# Duration of Impulse

---

DEFINITION

An LTI system has an **infinite impulse response** (IIR) if the duration of its impulse response  $h$  is infinite

- Example: Recursive average

$$y[n] = \mathcal{H}\{x[n]\} = x[n] + \alpha y[n - 1]$$


# Duration of Impulse

## DEFINITION

An LTI system has an **infinite impulse response (IIR)** if the duration of its impulse response  $h$  is infinite

- Example: Recursive average


$$y[n] = \mathcal{H}\{x[n]\} = x[n] + \alpha y[n-1]$$

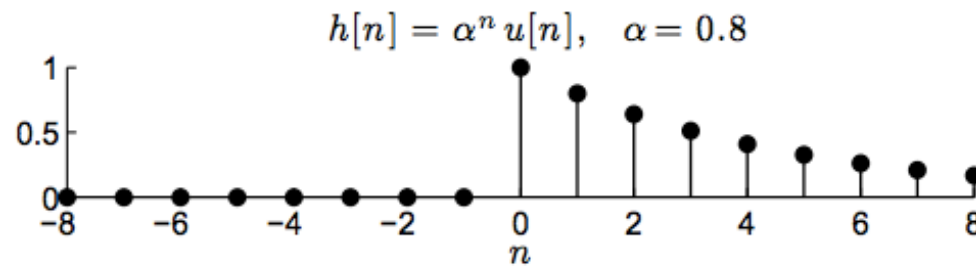

# BIBO Stability Revisited

DEFINITION


An LTI system is **bounded-input bounded-output (BIBO) stable** if a bounded input  $x$  always produces a bounded output  $y$



# BIBO Stability Revisited

DEFINITION

An LTI system is **bounded-input bounded-output (BIBO) stable** if a bounded input  $x$  always produces a bounded output  $y$




- Bounded input and output:

$$\|x\|_{\infty} < \infty \quad \text{and} \quad \|y\|_{\infty} < \infty$$

- Where

$$\|x\|_{\infty} = \max |x[n]|$$

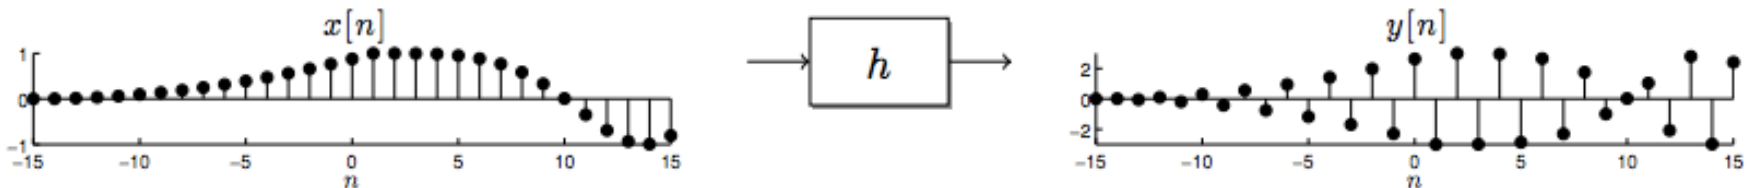




# BIBO Stability Revisited


DEFINITION

An LTI system is **bounded-input bounded-output (BIBO) stable** if a bounded input  $x$  always produces a bounded output  $y$



- Bounded input and output:

$$\|x\|_{\infty} < \infty \quad \text{and} \quad \|y\|_{\infty} < \infty$$

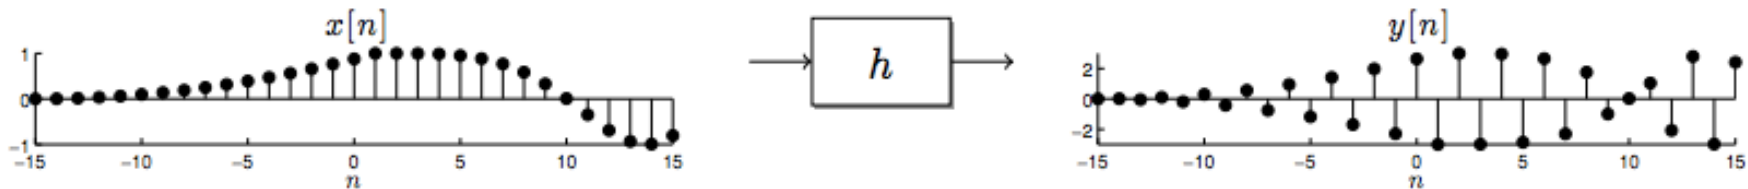

- An LTI system is BIBO stable **if and only if**

$$\|h\|_1 = \sum_{n=-\infty}^{\infty} |h[n]| < \infty$$



## BIBO Stability – Sufficient Condition

---

- Prove that if  $\|h\|_1 < \infty$  then the system is BIBO stable, then for any input  $\|x\|_\infty < \infty$  the output  $\|y\|_\infty < \infty$
- Recall that  $\|x\|_\infty < \infty$  means there exist a constant  $A$  such that  $|x[n]| < A < \infty$  for all  $n$

# BIBO Stability – Sufficient Condition

- Prove that if  $\|h\|_1 < \infty$  then the system is BIBO stable, then for any input  $\|x\|_\infty < \infty$  the output  $\|y\|_\infty < \infty$
- Recall that  $\|x\|_\infty < \infty$  means there exist a constant  $A$  such that  $|x[n]| < A < \infty$  for all  $n$
- Let  $\|h\|_1 = \sum_{n=-\infty}^{\infty} |h[n]| = B < \infty$
- Compute a bound on  $|y[n]|$  using the convolution of  $x$  and  $h$  and the bounds  $A$  and  $B$

$$\begin{aligned} |y[n]| &= \left| \sum_{m=-\infty}^{\infty} h[n-m] x[m] \right| \leq \sum_{m=-\infty}^{\infty} |h[n-m]| |x[m]| \\ &< \sum_{m=-\infty}^{\infty} |h[n-m]| A = A \sum_{k=-\infty}^{\infty} |h[k]| = AB = C < \infty \end{aligned}$$

- Since  $|y[n]| < C < \infty$  for all  $n$ ,  $\|y\|_\infty < \infty$  ✓





# BIBO Stability – Necessary Condition

---

- Prove that if  $\|h\|_1 = \infty$  the system is not BIBO stable – there exists an input  $\|x\|_\infty < \infty$  such that the output  $\|y\|_\infty = \infty$ 
  - Assume that  $x$  and  $h$  are real-valued; the proof for complex-valued signals is nearly identical




# BIBO Stability – Necessary Condition

- Prove that if  $\|h\|_1 = \infty$  the system is not BIBO stable – there exists an input  $\|x\|_\infty < \infty$  such that the output  $\|y\|_\infty = \infty$ 
  - Assume that  $x$  and  $h$  are real-valued; the proof for complex-valued signals is nearly identical
- Given an impulse response  $h$  with  $\|h\|_1 = \infty$ , form the tricky special signal  $x[n] = \text{sgn}(h[-n])$ 
  - $x[n]$  is the sign of the time-reversed impulse response  $h[-n]$

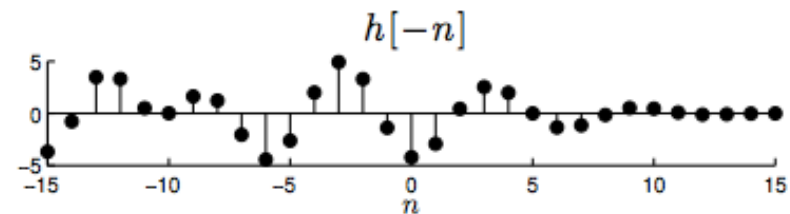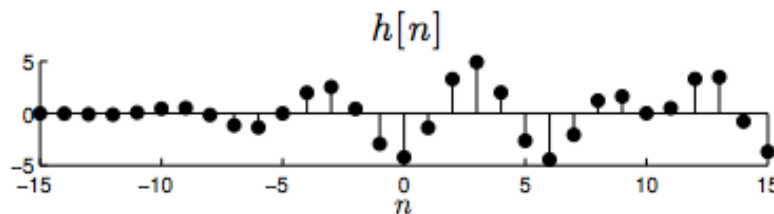

# BIBO Stability – Necessary Condition

- Prove that if  $\|h\|_1 = \infty$  the system is not BIBO stable – there exists an input  $\|x\|_\infty < \infty$  such that the output  $\|y\|_\infty = \infty$ 
  - Assume that  $x$  and  $h$  are real-valued; the proof for complex-valued signals is nearly identical
- Given an impulse response  $h$  with  $\|h\|_1 = \infty$ , form the tricky special signal  $x[n] = \text{sgn}(h[-n])$ 
  - $x[n]$  is the sign of the time-reversed impulse response  $h[-n]$
  - Note that  $x$  is bounded  $|x[n]| \leq 1$  for all  $n$

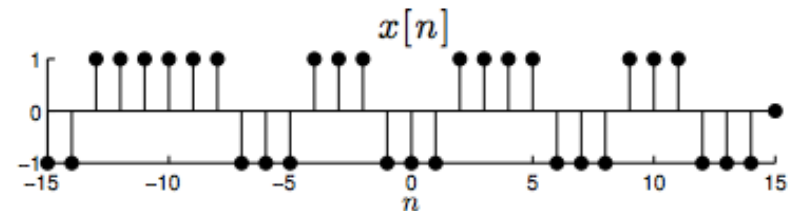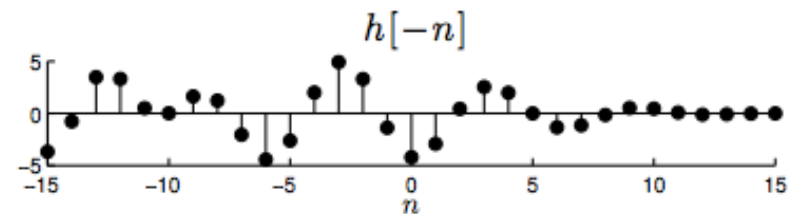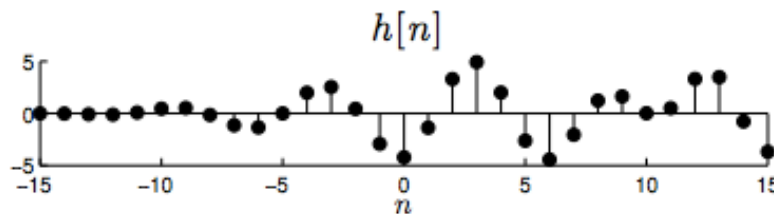

# BIBO Stability – Necessary Condition

- We are proving that if  $\|h\|_1 = \infty$  then the system is not BIBO stable – there exists an input  $\|x\|_\infty < \infty$  such that the output  $\|y\|_\infty = \infty$

- Armed with the tricky signal  $x$ , compute the output  $y[n]$  at  $n=0$

$$\begin{aligned} y[0] &= \sum_{m=-\infty}^{\infty} h[0-m] x[m] = \sum_{m=-\infty}^{\infty} h[-m] \operatorname{sgn}(h[-m]) \\ &= \sum_{m=-\infty}^{\infty} |h[-m]| = \sum_{k=-\infty}^{\infty} |h[k]| = \infty \end{aligned}$$

- Thus  $y$  is not bounded while  $x$  is bounded, so the system is not BIBO stable



# Examples

Example:  $h[n] = \begin{cases} \frac{1}{n} & n \geq 1 \\ 0 & \text{otherwise} \end{cases}$

$$\|h\|_1 = \sum_{n=1}^{\infty} \left| \frac{1}{n} \right| = \infty \Rightarrow \text{not BIBO}$$

Example:  $h[n] = \begin{cases} \frac{1}{n^2} & n \geq 1 \\ 0 & \text{otherwise} \end{cases}$

$$\|h\|_1 = \sum_{n=1}^{\infty} \left| \frac{1}{n^2} \right| = \frac{\pi^2}{6} \Rightarrow \text{BIBO}$$

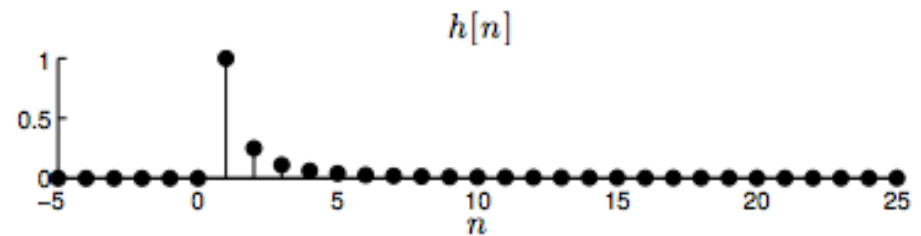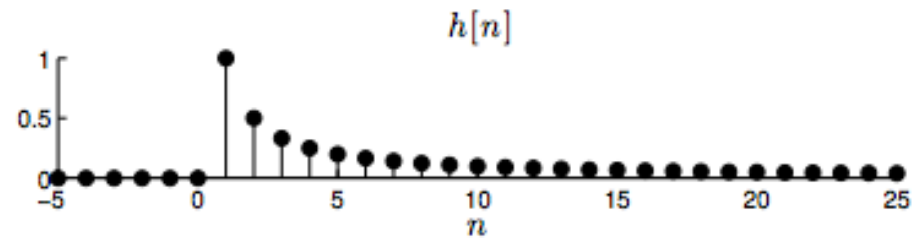



# Examples




Example:  $h[n] = \begin{cases} \frac{1}{n} & n \geq 1 \\ 0 & \text{otherwise} \end{cases}$

$$\|h\|_1 = \sum_{n=1}^{\infty} \left| \frac{1}{n} \right| = \infty \Rightarrow \text{not BIBO}$$

Example:  $h[n] = \begin{cases} \frac{1}{n^2} & n \geq 1 \\ 0 & \text{otherwise} \end{cases}$

$$\|h\|_1 = \sum_{n=1}^{\infty} \left| \frac{1}{n^2} \right| = \frac{\pi^2}{6} \Rightarrow \text{BIBO}$$

Example:  $h$  FIR  $\Rightarrow$  BIBO

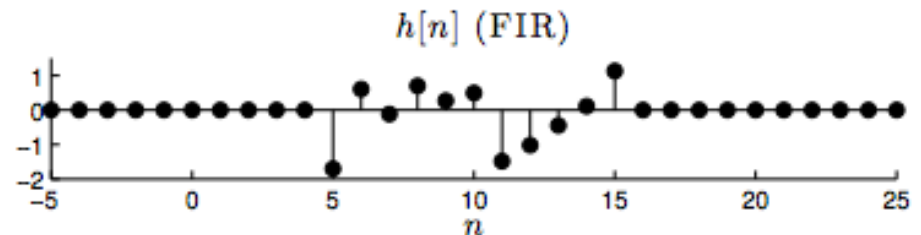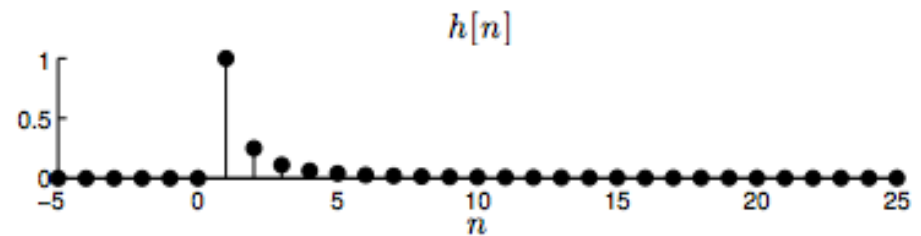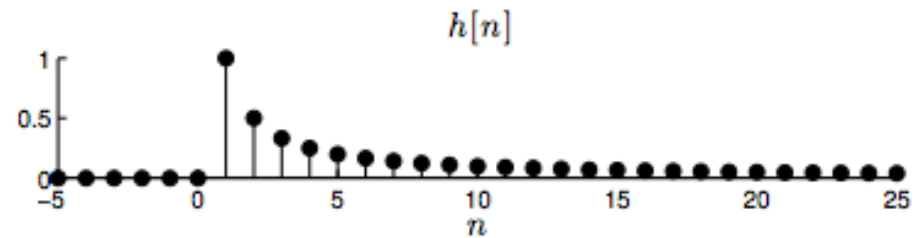



# Example

---


- Example: Recall the recursive average system  $y[n] = \mathcal{H}\{x[n]\} = x[n] + \alpha y[n-1]$
- Impulse response:  $h[n] = \alpha^n u[n]$

# Example

- Example: Recall the recursive average system  $y[n] = \mathcal{H}\{x[n]\} = x[n] + \alpha y[n-1]$
- Impulse response:  $h[n] = \alpha^n u[n]$


For  $|\alpha| < 1$

$$\|h\|_1 = \sum_{n=0}^{\infty} |\alpha|^n = \frac{1}{1-|\alpha|} < \infty \Rightarrow \text{BIBO}$$

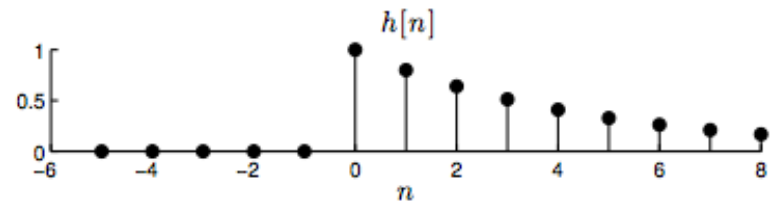

For  $|\alpha| > 1$

$$\|h\|_1 = \sum_{n=0}^{\infty} |\alpha|^n = \infty \Rightarrow \text{not BIBO}$$

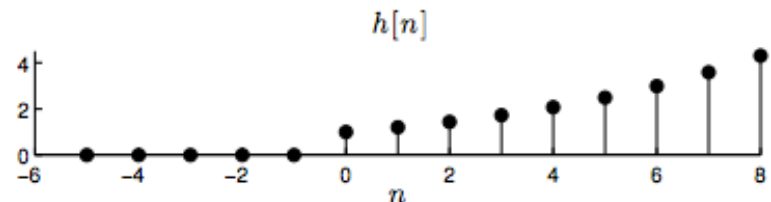



# Difference Equations

---

## □ Accumulator example

$$y[n] = \sum_{k=-\infty}^n x[k]$$

$$y[n] = x[n] + \sum_{k=-\infty}^{n-1} x[k]$$

$$y[n] = x[n] + y[n-1]$$

$$y[n] - y[n-1] = x[n]$$



# Difference Equations

---

## □ Accumulator example

$$y[n] = \sum_{k=-\infty}^n x[k]$$

$$y[n] = x[n] + \sum_{k=-\infty}^{n-1} x[k]$$

$$y[n] = x[n] + y[n-1]$$

$$y[n] - y[n-1] = x[n]$$

$$\sum_{k=0}^N a_k y[n-k] = \sum_{m=0}^M b_m x[n-m]$$

# Difference Equations


## □ Accumulator example

$$y[n] = \sum_{k=-\infty}^n x[k]$$

$$y[n] = x[n] + \sum_{k=-\infty}^{n-1} x[k]$$

$$y[n] = x[n] + y[n-1]$$

$$y[n] - y[n-1] = x[n]$$

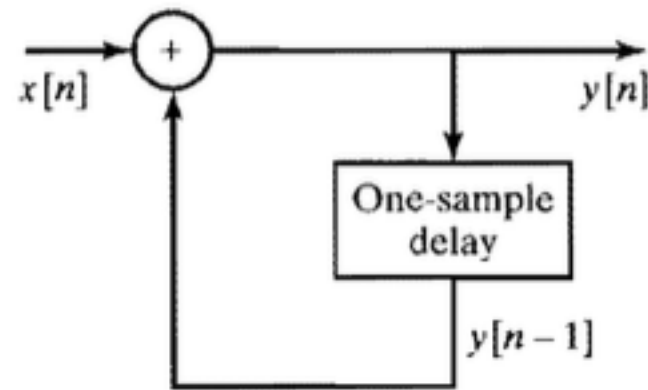

$$\sum_{k=0}^N a_k y[n-k] = \sum_{m=0}^M b_m x[n-m]$$



# Example: Difference Equation

---

- ❑ Moving Average System

$$y[n] = \frac{1}{M_1 + M_2 + 1} \sum_{k=-M_1}^{M_2} x[n-k]$$

- ❑ Causal?



# Example: Difference Equation

---

- Moving Average System

$$y[n] = \frac{1}{M_1 + M_2 + 1} \sum_{k=-M_1}^{M_2} x[n-k]$$

- Let  $M_1=0$  (i.e. system is causal)

$$y[n] = \frac{1}{M_2 + 1} \sum_{k=0}^{M_2} x[n-k]$$





# Big Ideas

---

- ❑ LTI Systems are a special class of systems with significant signal processing applications
  - Can be characterized by the impulse response
- ❑ LTI System Properties
  - Causality and stability can be determined from impulse response
- ❑ Difference equations suggest implementation of systems
  - Give insight into complexity of system



# Admin

---

- ❑ TA office hours
  - See website for full information
  - Be patient with us on locations... will post on Piazza for locations
- ❑ Diagnostic quiz answers out after deadline
- ❑ HW 1 out now
  - Due 2/2 at midnight
  - Submit in Canvas
    - Leave time to submit!