

Programming Languages and Techniques (CIS1200)

Lecture 10

Abstract types: Sets

Chapter 10

Announcements (1)

- Homework 3 available, due Tuesday at 11.59pm
 - Practice with BSTs, generic functions, first-class functions, and abstract types
 - *Start early!*
 - *Problems 1-4 can be done already*
 - *Problems 5-8 can be done after class today*
- Reading: Chapters 8, 9, and 10 of the lecture notes
- Please complete the Intro Survey (details on Ed)

Announcements (2)

- Midterm 1: Friday, September 27th
 - Coverage: up to Wednesday, Sep 25th (Chapters 1-10)
 - During lecture
 - Last names: A – Z Meyerson Hall B1
 - 60 minutes; closed book, closed notes
 - Review Material
 - old exams on the web site (“schedule” tab)
 - Review Session
 - Wednesday, September 25, 7:00-9:00pm, Towne 100 (will be recorded)
 - Review Videos will be posted this weekend

Sets as Abstract Types

Mathematical Sets

In math, we typically write sets like this:

\emptyset $\{1,2,3,4\}$ $\{\text{true},\text{false}\}$ $\{X,Y,Z\}$

with operations

$S \cup T$ for *union* and

$S \cap T$ for *intersection*;

and write $x \in S$ for the predicate

“ x is a member of the set S ”

Set properties

Certain facts hold of set operations:

1. If $x \in S$ then $x \in (S \cup T)$ for any other set T .
2. If $x \in T$ then $x \in (S \cup T)$ for any other set S .
3. $x \notin \emptyset$ (the empty set contains no elements)
4. $x \in \{x\}$ (the element x is in its singleton set)
5. $S \cup T = T \cup S$ (union is commutative)
6. $(S \cup T) \cup V = S \cup (T \cup V)$ (union is associative)
7. $S \cup S = S$ (union is idempotent)
8. $S \cup \emptyset = S$ (\emptyset is the “right unit” of union)
- ...

A Set is an Abstract Type


- An abstract type is defined by its *interface* and its *properties*, not its representation
- **Interface:** defines the type and operations
 - There is a type of sets
 - There is an empty set
 - There is a way to add elements to make a bigger set
 - There is a way to list all elements in a set
 - There is a way to test membership
- **Properties:** define how the operations interact with each other
 - Elements that were added can be found in the set
 - Adding an element a second time doesn't change the listing of elements
 - Adding elements in a different order doesn't change the listing of elements
- *When we use a set, we can forget about the representation!*

That is abstraction!!



concrete representation

abstract view

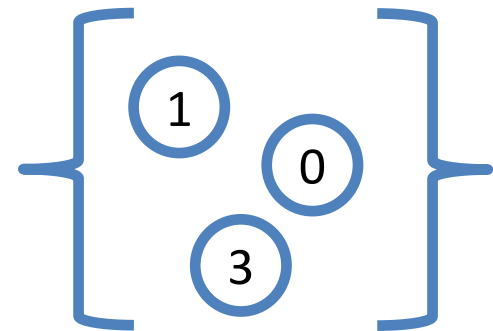

Sets in OCaml

OCaml directly supports the declaration of abstract types via *signatures*

Set Signature

The name of the signature

The **sig** keyword indicates an interface declaration

```
module type SET = sig
```

```
  type 'a set
```

Type declaration has no “right-hand side” – its representation is *abstract*!

```
  val empty      : 'a set
```

```
  val add        : 'a -> 'a set -> 'a set
```

```
  val member     : 'a -> 'a set -> bool
```

```
  val equals     : 'a set -> 'a set -> bool
```

```
  val set_of_list : 'a list -> 'a set
```

```
end
```

The interface members are the (only!) means of manipulating the set type.

Signature (a.k.a. interface): defines operations on the type

Math notation vs. Code

\emptyset	\sim	<code>empty</code>	<code>: 'a set</code>
$\{x\}$	\sim	<code>add x empty</code>	<code>: 'a set</code>
$\{x\} \cup S$	\sim	<code>add x s</code>	<code>: 'a set</code>
$x \in S$	\sim	<code>member x s</code>	<code>: bool</code>
$\{x\} \cup \{y\} = \{y\} \cup \{x\}$	\sim	<code>equals</code> <code>(add x (add y empty))</code> <code>(add y (add x empty))</code> <code>: bool</code>	

Examples of corresponding notions in math vs. OCaml.

Implementing sets

- There are many ways to implement sets
 - lists, trees, arrays, etc.
 - each of these could be a suitable *representation type*
- *How do we choose which implementation?*
 - Depends on the needs of the application...
 - How often is ‘member’ used vs. ‘add’?
 - How big can the sets be?
- *How do we preserve the invariants of the implementation?*
- Many implementations are of the flavor “a set is a ... with some *invariants*”
 - A set is a *list* with no repeated elements.
 - A set is a *tree* with no repeated elements
 - A set is a *binary search tree*

Invariant: a property that remains unchanged when a specified transformation is applied.

A module implements an interface

- An implementation of the set interface will look like this:

Name of the module

Signature that it implements

The **struct** keyword indicates a module implementation

```
module BSTSet : SET = struct
  ...
  (* implementations of type and operations *)
  ...
end
```

Implement the BSTSet Module

```
module BSTSet : SET = struct
```

```
  type 'a tree =
```

```
    | Empty
```

```
    | Node of 'a tree * 'a * 'a tree
```

```
  type 'a set = 'a tree
```

Module must define (give a *concrete representation* to) the type declared in the signature


```
  let empty : 'a set = Empty
```

```
  ... (* implementations of add, member, etc. *)
```

```
end
```


- The implementation must include everything promised by the interface
 - It can contain *more* functions and type definitions (e.g., auxiliary or helper functions) but those cannot be used outside the module
 - The types of the provided implementations must match the signature

Abstract vs. Concrete BSTSet

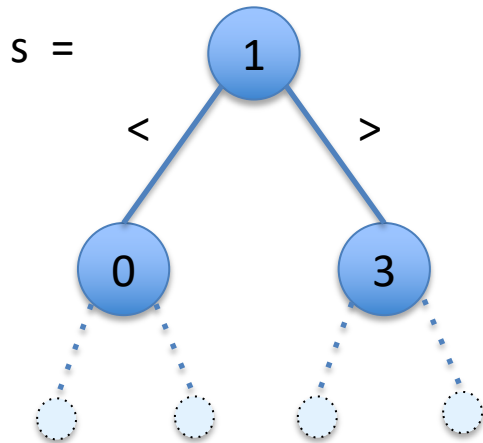

concrete representation

abstract view

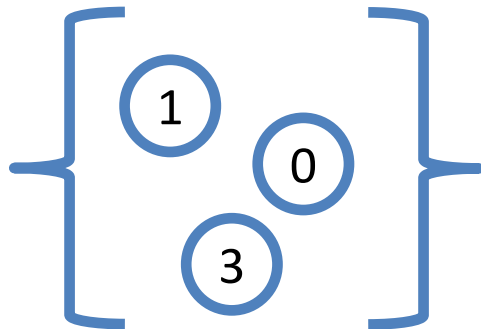

```
module BSTSet : SET = struct
  type 'a tree = ...
  type 'a set = 'a tree
  let empty : 'a set = Empty
  let add (x:'a) (s:'a set) : 'a set =
    ... (* can treat s as a tree *)
```

end

```
module type SET = sig
  type 'a set
  val empty : 'a set
  val add : 'a -> 'a set -> 'a set
end
```


```
(* A client of the BSTSet module *)
(* Cannot treat a set as a tree *)
;; open BSTSet
```

```
let s : int set
  = add 0 (add 3 (add 1 empty))
```

A different Implementation

```
module ULSet : SET =  
  struct  
    type 'a set = 'a list  
    let empty : 'a set = []  
    ...  
  end
```

A different definition for
the type set




Abstract vs. Concrete ULSet

```
module ULSet : SET = struct
  type 'a set = 'a list
  let empty : 'a set = []
  let add (x:'a) (s:'a set) : 'a set =
    x::s (* can treat s as a list *)
end
```

s = 0::3::1::[]

concrete representation

abstract view

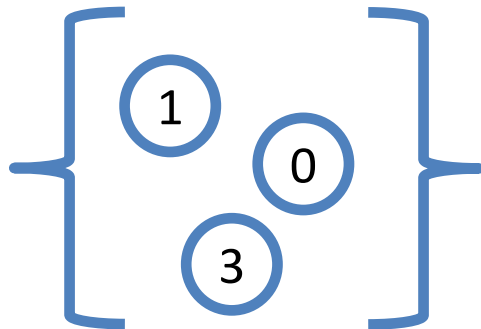

```
module type SET = sig
  type 'a set
  val empty : 'a set
  val add : 'a -> 'a set -> 'a set
end
```

```
(* A client of the ULSet module *)
(* Cannot treat a set as a list *)
;; open ULSet
```

```
let s : int set
  = add 0 (add 3 (add 1 empty))
```

Client code doesn't change!

Implementing ULSet

See [sets.ml](#)

Testing (and using) sets

- Use “open” to bring all names defined in the interface into scope
- Any names that were already in scope are shadowed

```
;; open ULSet
```

```
let s1 = add 3 empty
```

```
let s2 = add 4 empty
```

```
let s3 = add 4 s1
```

```
let test () : bool = (member 3 s1)
```

```
;; run_test "ULSet.member 3 s1" test
```

```
let test () : bool = (member 4 s3)
```

```
;; run_test "ULSet.member 4 s3" test
```

Testing (and using) sets

- Alternatively, use the “dot” syntax:
`ULSet.<member>`
- Note: Module names must be capitalized in OCaml
- Useful when two modules define the same operations

```
let s1 = ULSet.add 3 ULSet.empty
let s2 = ULSet.add 4 ULSet.empty
let s3 = ULSet.add 4 s1
```


```
let test () : bool = (ULSet.member 3 s1)
;; run_test "ULSet.member 3 s1" test
```

```
let test () : bool = (ULSet.member 4 s3)
;; run_test "ULSet.member 4 s3" test
```

10: Does this code typecheck?


 0

yes



0%

no



0%

Does this code type check?

```
;; open BSTSet  
let s1 : int set = add 1 empty
```

1. yes
2. no


```
module type SET = sig  
  type 'a set  
  val empty : 'a set  
  val add    : 'a -> 'a set -> 'a set  
end  
  
module BSTSet : SET = struct  
  type 'a tree =  
    | Empty  
    | Node of 'a tree * 'a * 'a tree  
  type 'a set = 'a tree  
  let empty : 'a set = Empty  
  ...  
end
```

Answer: yes


10: Does this code typecheck?

 0

yes



no



Does this code type check?

```
;; open BSTSet
let s1 = add 1 empty
let i1 = begin match s1 with
             | Node (_,k,_) -> k
             | Empty -> failwith "impossible"
           end
```

1. yes
2. no

```
module type SET = sig
  type 'a set
  val empty : 'a set
  val add    : 'a -> 'a set -> 'a set
end


module BSTSet : SET = struct
  type 'a tree =
    | Empty
    | Node of 'a tree * 'a * 'a tree
  type 'a set = 'a tree
  let empty : 'a set = Empty
  ...
end
```

Answer: no, add constructs a set, not a tree

10: Does this code typecheck?


 0

yes



0%

no



0%

Does this code type check?

```
;; open BSTSet
let s1 = add 1 empty
let i1 = size s1
```

1. yes
2. no

```
module type SET = sig
  type 'a set
  val empty : 'a set
  val add    : 'a -> 'a set -> 'a set
end


module BSTSet : SET = struct
  type 'a tree =
    | Empty
    | Node of 'a tree * 'a * 'a tree
  type 'a set = 'a tree
  let empty : 'a set = Empty
  let size (t : 'a tree) : int = ...
  ...
end
```

Answer: no, cannot access helper functions outside the module

10: Does this code typecheck?


 0

yes



0%

no



0%

Does this code type check?

```
;; open BSTSet  
let s1 : int set = Empty
```

1. yes
2. no

```
module type SET = sig  
  type 'a set  
  val empty : 'a set  
  val add    : 'a -> 'a set -> 'a set  
end  
  
module BSTSet : SET = struct  
  type 'a tree =  
    | Empty  
    | Node of 'a tree * 'a * 'a tree  
  type 'a set = 'a tree  
  let empty : 'a set = Empty  
  ...  
end
```

Answer: no, the Empty data constructor is not available outside the module

If a client module works correctly and starts with:

```
;; open ULSet
```

will it continue to work if we change that line to:

```
;; open BSTSet
```

assuming that ULSet and BSTSet both implement SET and satisfy all of the set properties?

1. yes
2. no

Answer: yes (though performance may be different)

```

module type SET = sig
  type 'a set
  val empty : 'a set
  val add    : 'a -> 'a set -> 'a set
  val member : 'a -> 'a set -> bool
end

module BSTSet : SET = struct
  type 'a tree =
    | Empty
    | Node of 'a tree * 'a * 'a tree
  type 'a set = 'a tree
  let empty : 'a set = Empty
  ...
end

```

Is it possible for a client to call **member** with a tree that is not a BST?

1. yes
2. no

No: the BSTSet operations preserve the BST invariants.
there is no way to construct a non-BST tree using the interface.

Completing ULSet

See [sets.ml](#)

Equality of Sets


- Note that the interface for our abstract sets includes:

```
val equals : 'a set -> 'a set -> bool
```

- This function defines what it means for two sets to be “equal”.
- Why can't we just use OCaml's built-in `=` to compare?
 - This generic, built-in equality operation = compares the *structure* of its two inputs to see whether they are the same.
 - BUT(!) two values with *different* structure may represent the *same* collection of elements.
- In ULSet:


3::0::1::[]
concrete representation

abstract view



0::1::3::[]
concrete representation

abstract view



These two values
are not equal as
lists.

These two values
are equal as sets.

When defining an abstract type, you may need to define a different notion of equality

- The built-in “structural equality” written as = may not be appropriate
- Be sure to use the ‘equals’ function when comparing, e.g., sets
- (Other generic operations, like < and > may also be affected.)

What Should You Test?

- **Interface:** defines operations on the type
- **Properties:** define how the operations interact
 - Elements that were added can be found in the set
 - Adding an element a second time doesn't change the elements of a set
 - Adding in a different order doesn't change the elements of a set



Test the properties!

A *property* is a general statement about the behavior of the interface: For *any* set *S* and *any* element *x*:

$$\text{member } x \text{ (add } x \text{ } s) = \text{true}$$

A (good) test case checks a specific instance of the property:

```
let s1 = add 3 empty
let test () : bool = (member 3 s1)
;; run_test "ULSet.member 3 s1" test
```

Property-based Testing

1. Translate informal requirements into general statements about the interface.

Example: “Order doesn’t matter” becomes

For *any* set s and *any* elements x and y ,
 $\text{add } x (\text{add } y \ s) \text{ equals } \text{add } y (\text{add } x \ s)$

2. Write tests for the “interesting” instances of the general statement.

Example. “interesting” choices:

$s = \text{empty}$, $s = \text{nonempty}$,

$x = y$, $x \neq y$

one or both of x, y already in s

Notes:

- one can’t (usually) exhaustively test all possibilities (too many!)
so instead, cover the “interesting” possibilities
- be careful with equality! `ULSet.equals` is *not* the same as `=`.